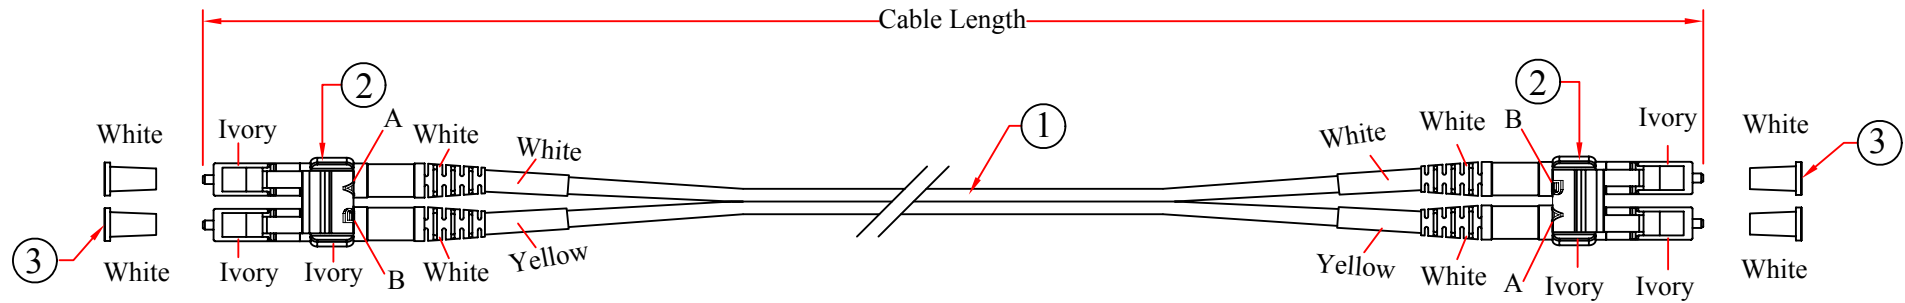


REV.	DESCRIPTION	DATE
A		03-2014






RoHS

NOTES:

1. Insertion loss < 0.5 dB
2. Fiber Extension: -0.05 um < H < +0.05um
3. Ø1.25um Ferrule End-face Radius: 7< R < 25mm
4. Apex Offset: < 50um
5. Increase in Insertion Loss after 500 mating: 0.2 dB Max
6. Operating Temperature: -20 °C to +70 °C
7. Storage Temperature: -40 °C to +80 °C

PART NO.	CABLE LENGTH	PART NO.	CABLE LENGTH
LCLC-11001	1 Meter	LCLC-11008	8 Meter
LCLC-11002	2 Meter	LCLC-11009	9 Meter
LCLC-11003	3 Meter	LCLC-11010	10 Meter
LCLC-11004	4 Meter	LCLC-11015	15 Meter
LCLC-11005	5 Meter	LCLC-11020	20 Meter
LCLC-11006	6 Meter	LCLC-11025	25 Meter
LCLC-11007	7 Meter	LCLC-11030	30 Meter

4		ITEM NUMBER	LCLC-110xx		DRAWER	JL
3	Cap	TITLE	Fiber Optic Cable, LC / LC, Multimode, Duplex, 50/125		CHECKED	
2	LC Multimode (Easy Removable Clip and Short Boot)	MATERIAL		SCALE	APPROVED	
1	OD:2.0mm, Multimode, 50/125um Optical Fiber Cable, Orange Outer PVC Jacket	REV.	A	UNIT	INCH	 
NO.	SPECIFICATIONS	DRAWING NO:				
	BOM LIST	ID(NO.)	182			