


REV.	DESCRIPTION	DATE
A		03-2014

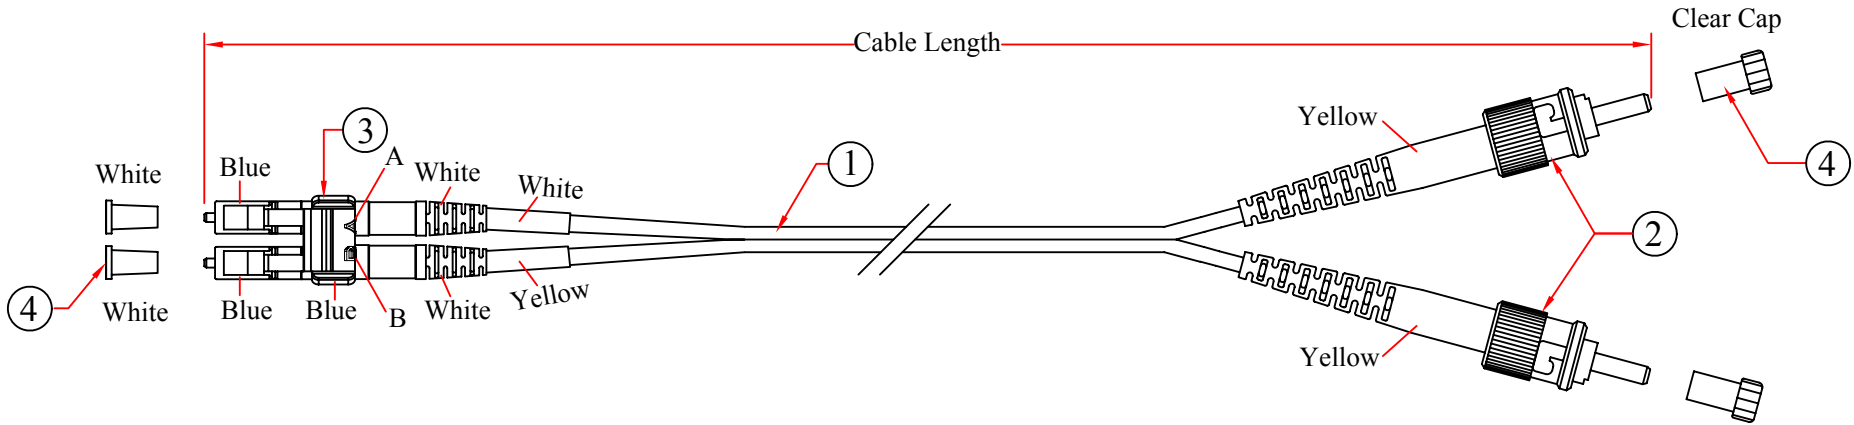

RoHS

NOTES:

1. Insertion loss < 0.3 dB
2. Return loss > 50 dB
3. Fiber Extention: -0.05 um < H < +0.05um
4. Ø1.25um Ferrule End-face Radius: 7 < R < 25mm
Ø25um Ferrule End-face Radius: 10 < R < 25mm
5. Apex Offset: < 50um
6. Insertion Loss will be Increased after 500 mating: 0.2 dB Max
7. Operating Temperature: -20 °C to +70 °C
8. Storage Temperature: -40 °C to +80 °C

PART NO.	CABLE LENGTH	PART NO.	CABLE LENGTH
LCST-01201	1 Meter	LCST-01208	8 Meter
LCST-01202	2 Meter	LCST-01210	10 Meter
LCST-01203	3 Meter	LCST-01212	12 Meter
LCST-01204	4 Meter	LCST-01215	15 Meter
LCST-01205	5 Meter	LCST-01220	20 Meter
LCST-01206	6 Meter	LCST-01225	25 Meter
LCST-01207	7 Meter	LCST-01230	30 Meter

4	Cap
3	LC Singlemode (Easy Removable Clip and Short Boot)
2	ST Singlemode
1	OD:2.0mm, Single Mode, G652D 9/125um Optical Fiber Cable, Yellow Outer PVC Jacket
NO.	SPECIFICATIONS
	BOM LIST

ITEM NUMBER	LCST-012xx		DRAWER	JL
TITLE	LC / ST, Single Mode, Duplex Fiber Optic Cable, 9/125		CHECKED	
MATERIAL	SCALE		APPROVED	
REV.	A	UNIT	INCH	
DRAWING NO:				
ID(NO.)	182			