


REV.	DESCRIPTION	DATE
A		03-2015

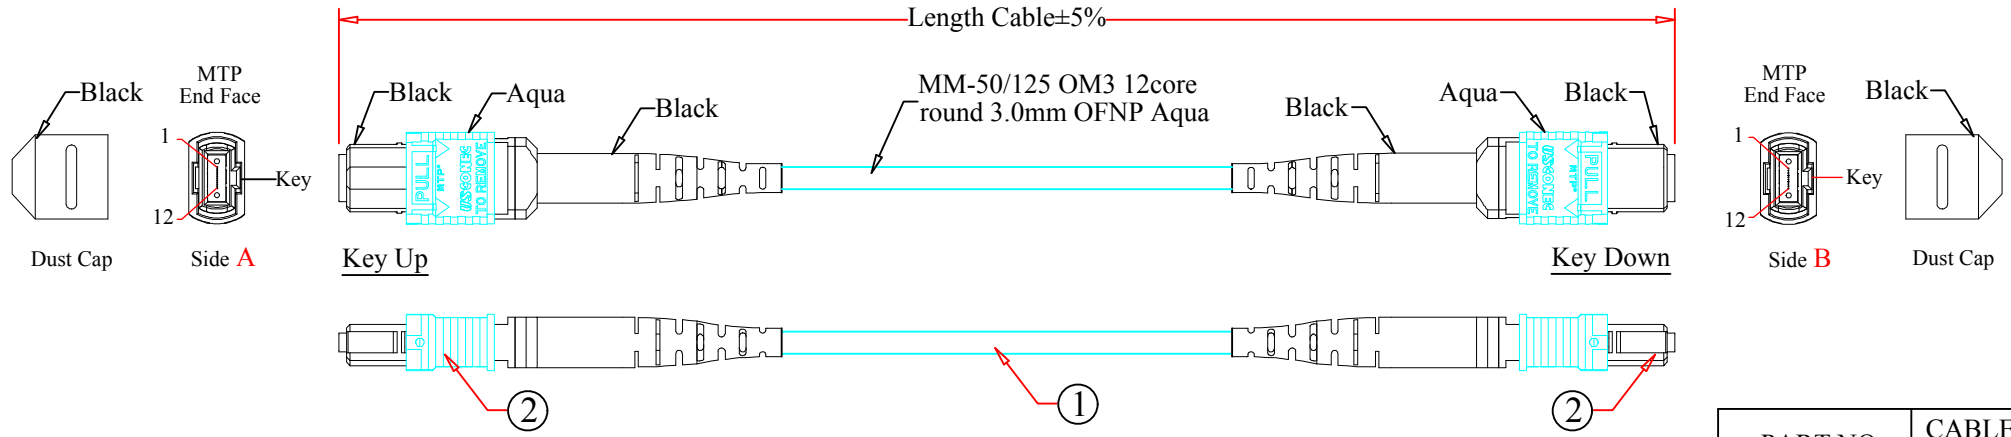


Notes:

Insertion Loss:
 0.75dB MAX @850nm for each MTP+Cord Attenuation
 Cord Attenuation: L(m)/1000(m)x3.5dB/1km@850nm

Wiring Diagram(Type B)

Side A	Fiber Color	Side B
1	Blue	12
2	Orange	11
3	Green	10
4	Brown	9
5	Grey	8
6	White	7
7	Red	6
8	Black	5
9	Yellow	4
10	Violet	3
11	Pink	2
12	Aqua	1

Cable Structure

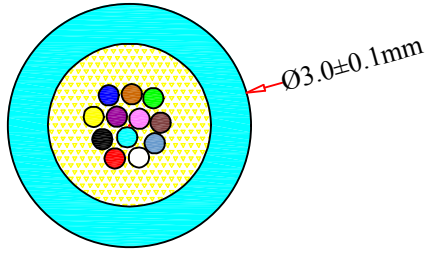

RoHS

PART NO.	CABLE LENGTH
MPMP-31001	1 Meter
MPMP-31002	2 Meter
MPMP-31003	3 Meter
MPMP-31005	5 Meter
MPMP-31007	7 Meter
MPMP-31010	10 Meter
MPMP-31015	15 Meter
MPMP-31030	30 Meter
MPMP-31050	50 Meter

2	US CONEC MTP Connector
1	MM-50/125 OM3 12Core Round 3.0mm,OFNP Aqua Jacket
NO.	SPECIFICATIONS
	BOM LIST

ITEM NUMBER	MPMP-310xx			DRAWER	JL
TITLE	Plenum Fiber Optic Cable, 12Core MTP/Femlae to MTP/Female, MM-50/125,OM3 OFNP			CHECKED	
MATERIAL		SCALE		APPROVED	
REV.	A	UNIT	MM		
DRAWING NO:					
ID(NO.)	124				