





REV.	DESCRIPTION	DATE
A		03-2015

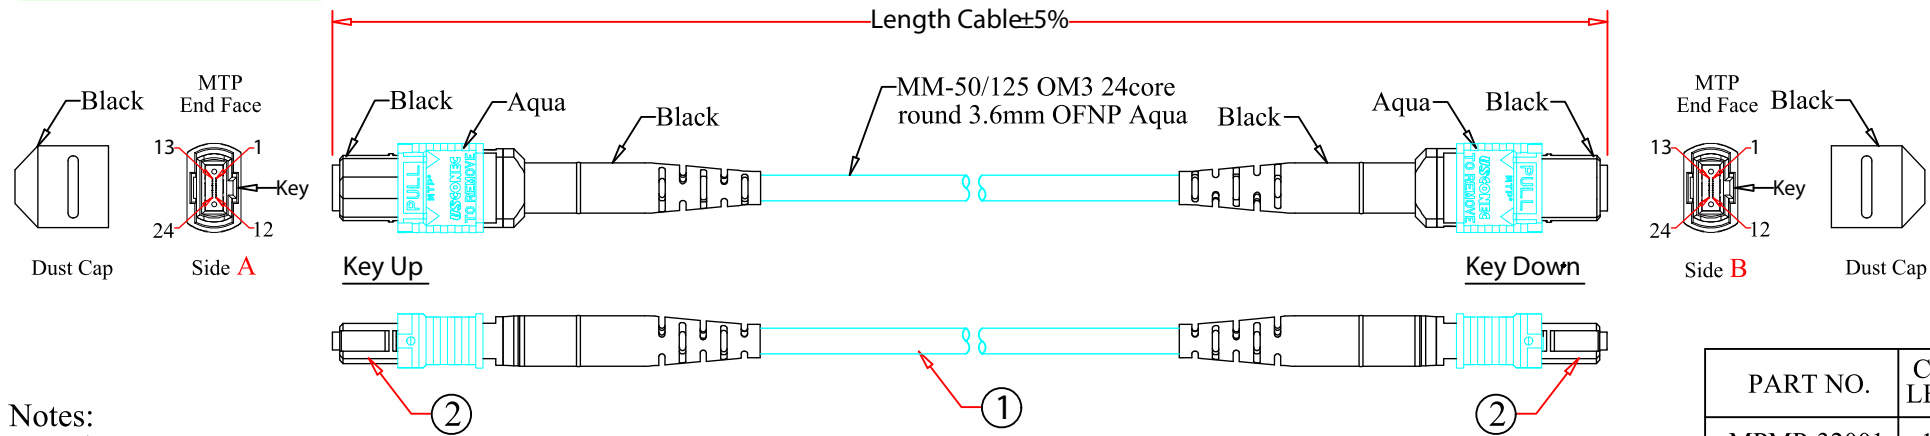

Notes:
 Insertion Loss:
 0.75dB MAX @850nm for each MTP+Cord Attenuation
 Cord Attenuation: L(m)/1000(m)x3.5dB/1km@850nm

Wiring Diagram(Type A)

Side A	Fiber Color	Side B	Side A	Fiber Color	Side B
1	Blue	13	13	Blue	1
2	Orange	14	14	Orange	2
3	Green	15	15	Green	3
4	Brown	16	16	Brown	4
5	Grey	17	17	Grey	5
6	White	18	18	White	6
7	Red	19	19	Red	7
8	Black	20	20	Natural	8
9	Yellow	21	21	Yellow	9
10	Violet	22	22	Violet	10
11	Pink	23	23	Pink	11
12	Aqua	24	24	Aqua	12

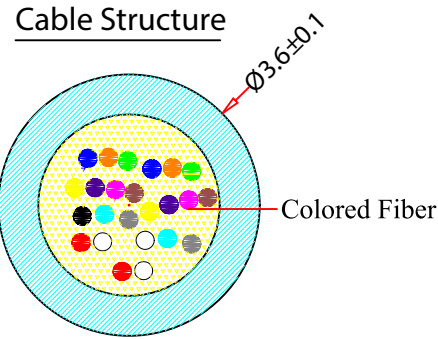

PART NO.	CABLE LENGTH
MPMP-32001	1 Meter
MPMP-32002	2 Meter
MPMP-32003	3 Meter
MPMP-32005	5 Meter
MPMP-32007	7 Meter
MPMP-32010	10 Meter
MPMP-32015	15 Meter
MPMP-32030	30 Meter
MPMP-32050	50 Meter

ITEM NUMBER	MPMP-320xx			DRAWER	JL
TITLE	Plenum Fiber Optic Cable, MTP/F-MTP/F OM3 24 Core OFNP 50/125			CHECKED	
MATERIAL		SCALE		APPROVED	
REV.	A	UNIT	MM		
DRAWING NO:				 888-212-8295	
ID(NO.)	124				

2	US CONEC MTP Connector
1	MM-50/125 OM3 24core round 3.6mm OFNP Aqua
NO.	SPECIFICATIONS
	BOM LIST