


| Rev. | Description | Date |
|------|-------------|---------|
| A | | 08-2018 |

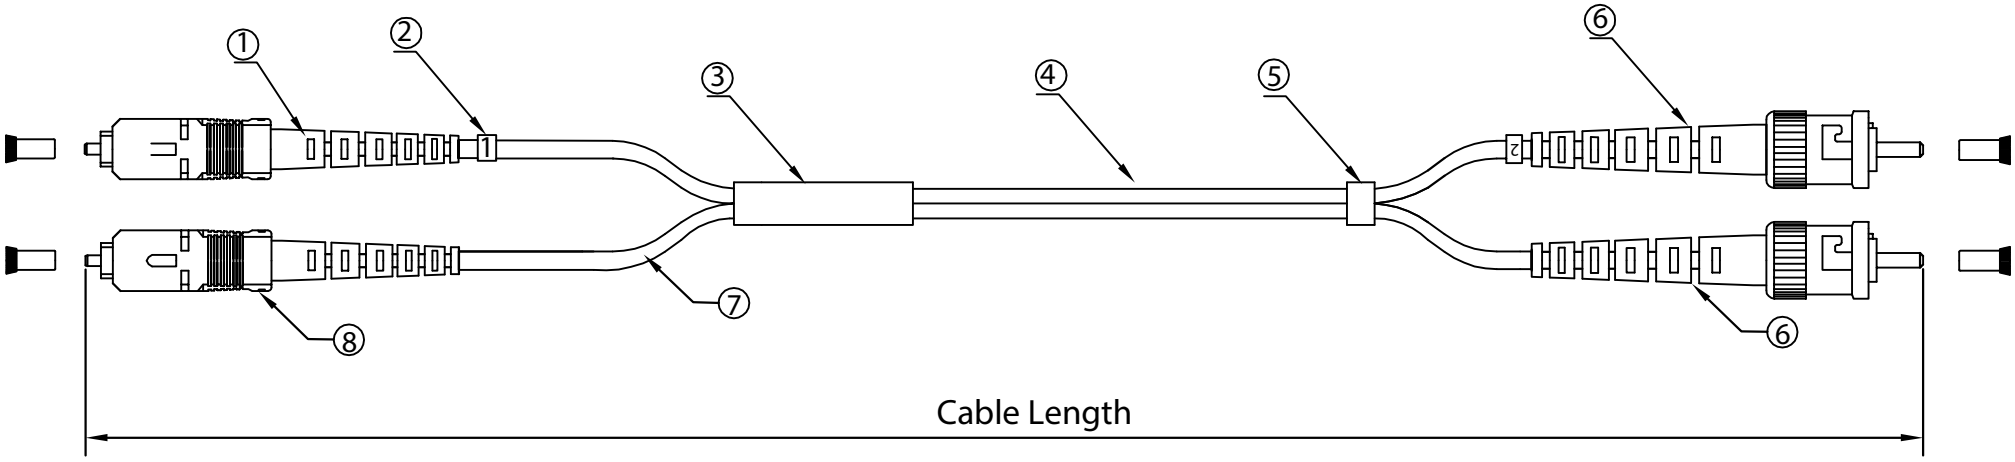


RoHS

Notes:

Insertion Loss ≤ 0.3 dB
 Coupled Power Ratio(CPR) CPR ≤ 26 dB (Typical Value:20~22dB)

| PART NO | CABLE LENGTH |
|------------|--------------|
| SCST-12001 | 1 Meter |
| SCST-12002 | 2 Meter |
| SCST-12003 | 3 Meter |
| SCST-12005 | 5 Meter |

| | |
|-----|---|
| 8 | SC SM Connector (Blue housing Blue boot) |
| 7 | 3.0mm,Simplex,SM-9/125 ,PVC,Optical Fiber Cable(Yellow) |
| 6 | ST MM Connector (Metal Housing Black Boot) |
| 5 | Shrinkage Tube |
| 4 | 3.0mm,Duplex,MM-50/125, PVC, Optical Fiber Cable (Orange) |
| 3 | Rubber Shrinkage Tube (Splice Joint Tube Inside) |
| 2 | 1/2 Code |
| 1 | SC MM Connector (Beige Housing Beige Boot) |
| No. | Specifications |
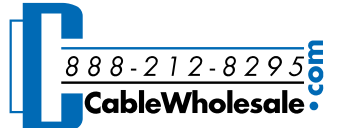
| | | |
|--------------|--|---|
| Item Number: | SCST-120xx | |
| Title: | SC/ST OM2 Multimode Duplex Mode Conditioning Fiber Optic Cable, 50/125 | |
| Drawn by: | JL |  |
| Approved by: | MAC | |
| ID: | 228 | |