


Rev.	Description	Date
A		08-2018

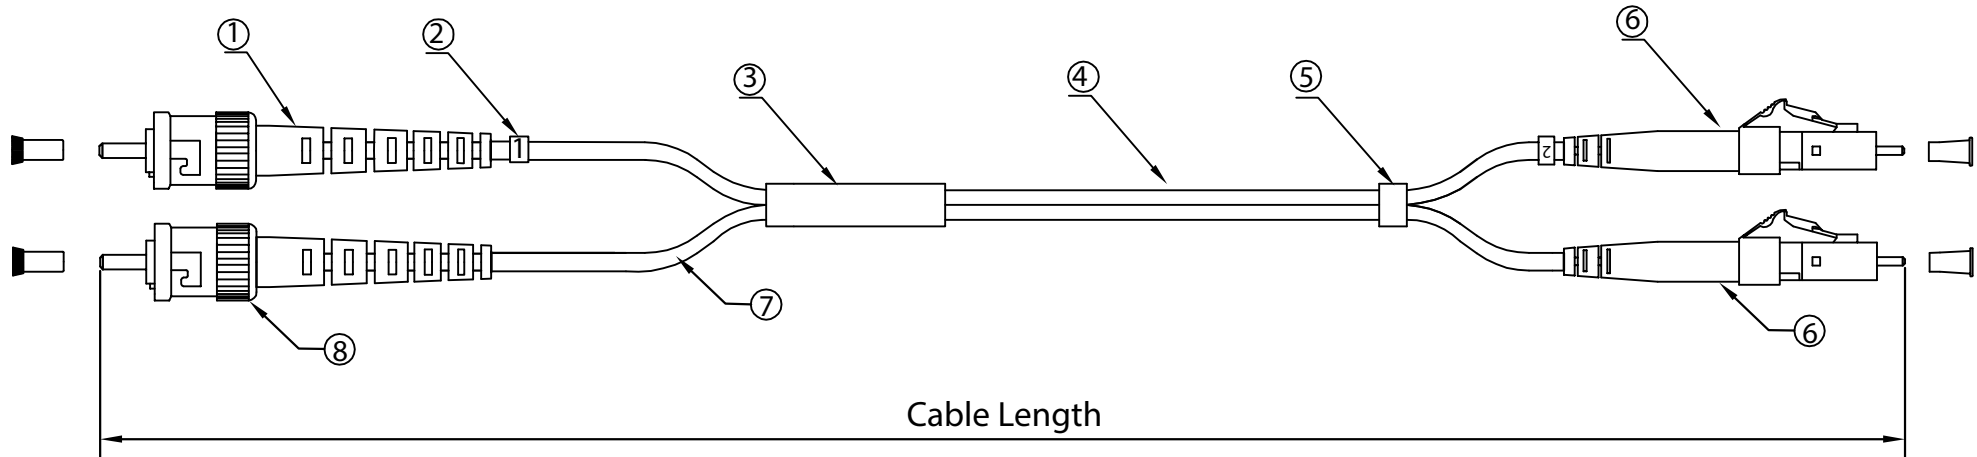


RoHS

**Notes:**

Insertion Loss  $\leq 0.3$  dB  
 Coupled Power Ratio(CPR)  $CPR \leq 26$  dB ( Typical Value:20~22dB )

PART NO	CABLE LENGTH
STLC-12101	1 Meter
STLC-12102	2 Meter
STLC-12103	3 Meter
STLC-12105	5 Meter

8	ST SM Connector ( Metal Housing Yellow Boot )
7	3.0mm,Simplex,SM-9/125 ,PVC,Optical Fiber Cable (Yellow)
6	LC MM Simplex Connector (Beige Housing White Boot )
5	Shrinkage Tube
4	3.0mm,Duplex,MM-62.5/125, PVC, Optical Fiber Cable (Orange)
3	Rubber Shrinkage Tube(Splice Joint Tube Inside)
2	1/2 Code
1	ST MM Connector (Metal Housing Black Boot)
No.	Specifications

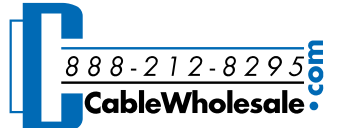Item Number:	STLC-121xx	
Title:	ST/LC OM1 Multimode Duplex Mode Conditioning Fiber Optic Cable, 62.5/125	
Drawn by:	JL	
Approved by:	MAC	
ID:	228	