


Rev.	Description	Date
A		08-2018

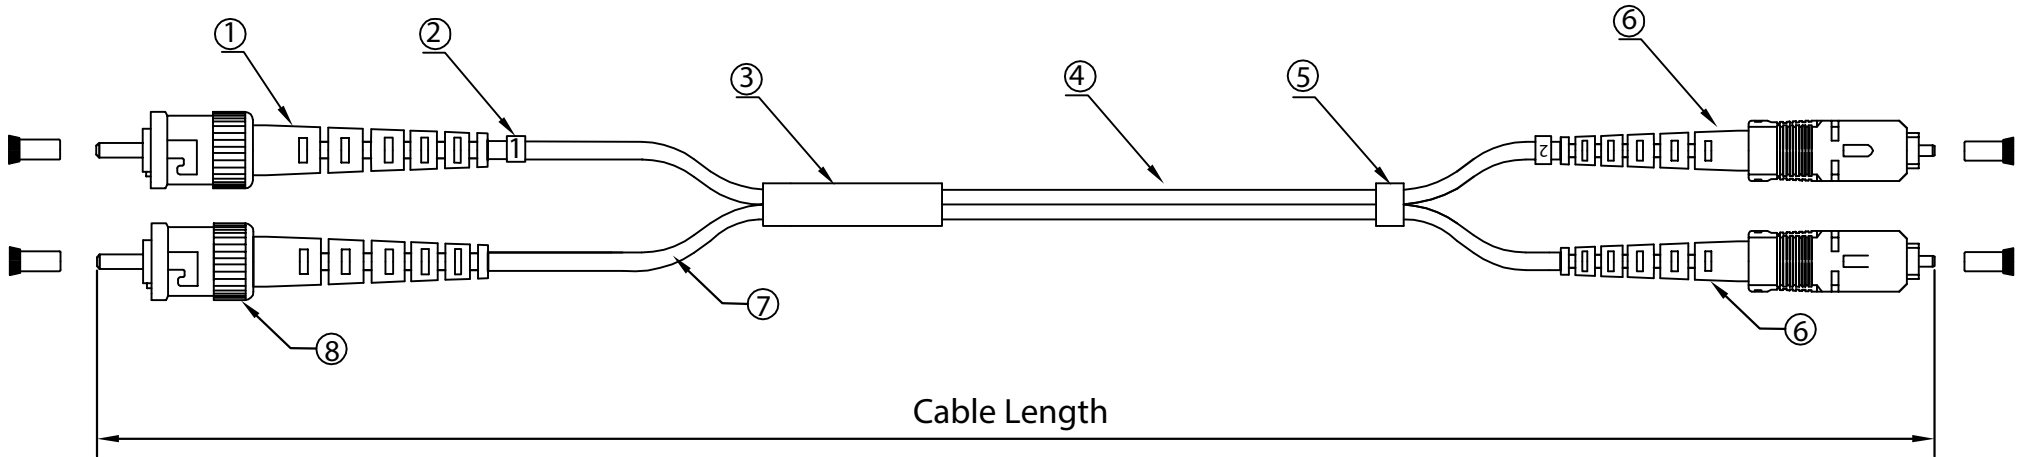

RoHS


Notes:

Insertion Loss ≤ 0.3 dB

Coupled Power Ratio(CPR) $CPR \leq 26$ dB (Typical Value:20~22dB)

PART NO	CABLE LENGTH
STSC-12001	1 Meter
STSC-12002	2 Meter
STSC-12003	3 Meter
STSC-12005	5 Meter

8	ST SM Connector (Metal Housing Yellow Boot)
7	3.0mm,Simplex,SM-9/125 ,PVC,Optical Fiber Cable (Yellow)
6	SC MM Connector (Beige housing Beige boot)
5	Shrinkage Tube
4	3.0mm,Duplex,MM-50/125, PVC, Optical Fiber Cable (Orange)
3	Rubber Shrinkage Tube(Splice Joint Tube Inside)
2	1/2 Code
1	ST MM Connector (Metal Housing Black Boot)
No.	Specifications

Item Number:	STSC-120xx	
Title:	ST/SC OM2 Multimode Duplex Mode Conditioning Fiber Optic Cable, 50/125	
Drawn by:	JL	 888-212-8295.com
Approved by:	MAC	
ID:	228	