


Rev.	Description	Date
A		08-2018

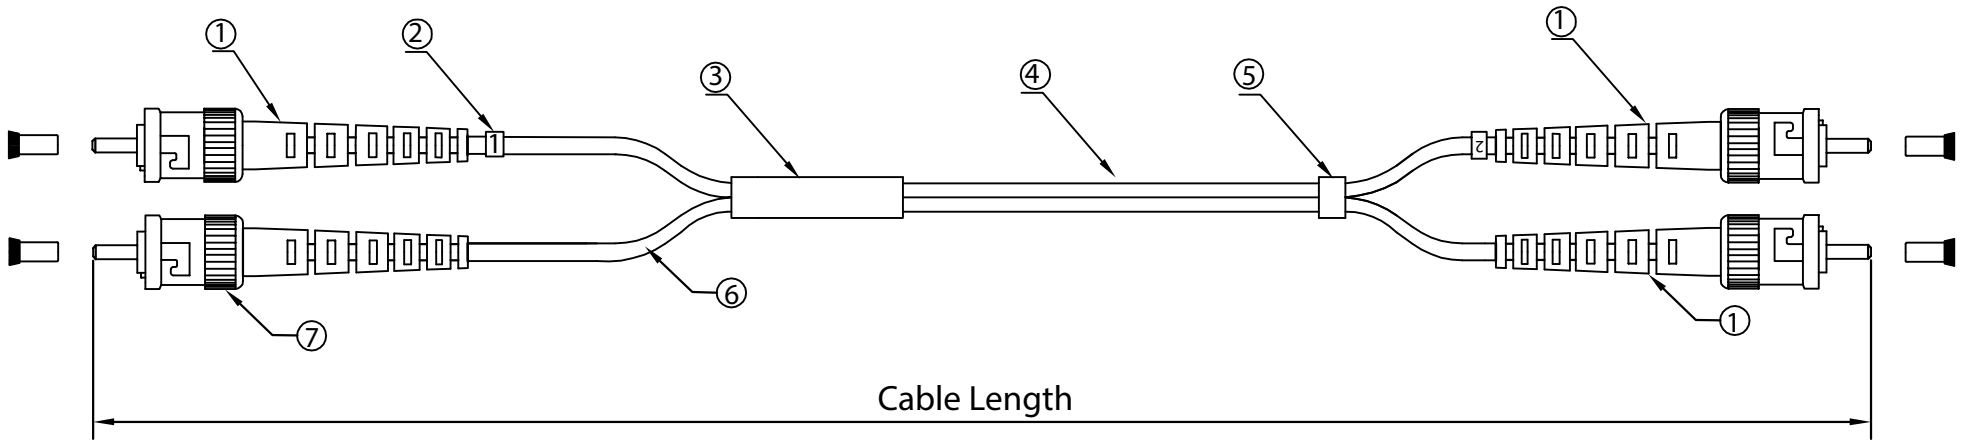


Notes:

Insertion Loss ≤ 0.3 dB
 Coupled Power Ratio(CPR) $CPR \leq 26$ dB (Typical Value:20~22dB)

RoHS

PART NO	CABLE LENGTH
STST-12101	1 Meter
STST-12102	2 Meter
STST-12103	3 Meter
STST-12105	5 Meter

8	
7	ST SM Connector (Metal Housing Yellow Boot)
6	3.0mm,Simplex,SM-9/125 ,PVC,Optical Fiber Cable (Yellow)
5	Shrinkage Tube
4	3.0mm,Duplex,MM-62.5/125, PVC, Optical Fiber Cable (Orange)
3	Rubber Shrinkage Tube(Splice Joint Tube Inside)
2	1/2 Code
1	ST MM Connector (Metal Housing Black Boot)
No.	Specifications

Item Number:	STST-121xx	
Title:	ST/ST OM1 Multimode Duplex Mode Conditioning Fiber Optic Cable, 62.5/125	
Drawn by:	JL	
Approved by:	MAC	
ID:	228	