

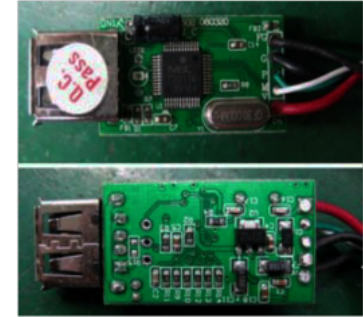


# RoHS

Rev.	Description	Date
A		08-2020

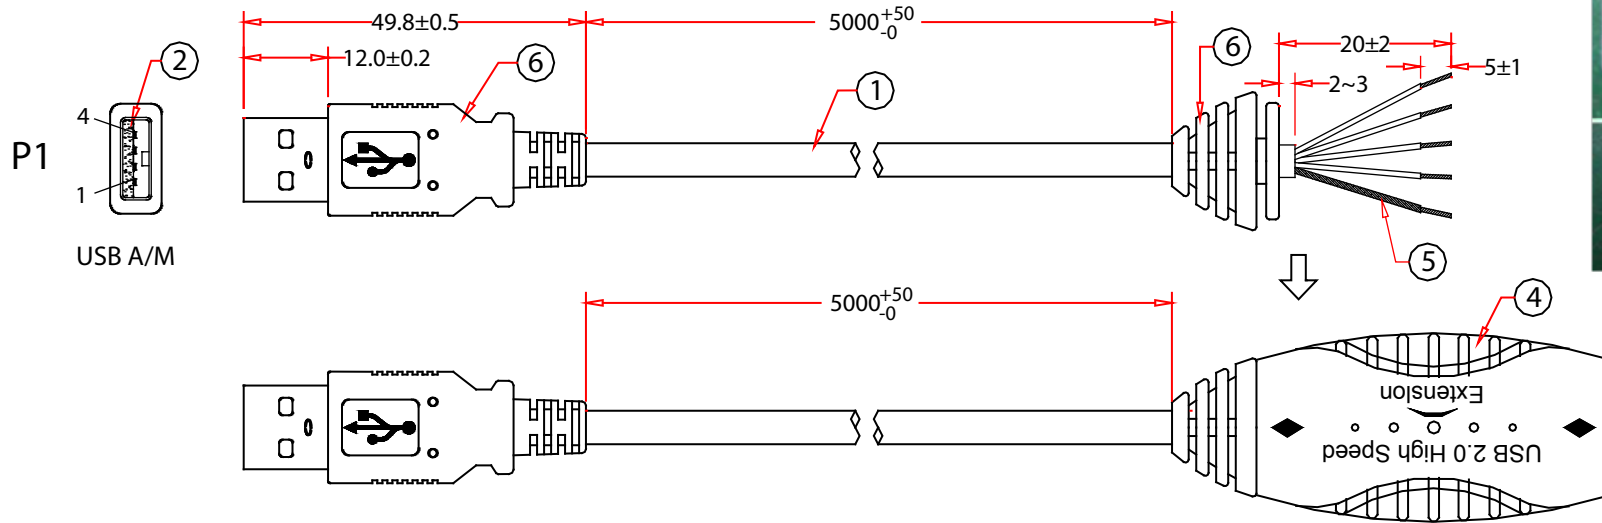

P3




### Pin Assignment

P1	P3	P2	
1	1	1	Red 20#
2	2	2	Green
3	3	3	White
4	4	4	Black 20#
Shell	5	Shell	Braid+Drain

### Features :

1. Full compliance with USB Ver. 2.0 / 1.1
2. Supports 480 Mbps high speed ,12 Mbps full speed and 1.5 Mbps low speed data transfer rate
3. One upstream port and One downstream port
4. Support plug & play and hot –swapping functions
5. Bus power mode.
6. Support EHCI / UHCI / OHCI interface.
7. Extend up to 25 meters by cascading up to 5 repeater cables
8. Support Windows 98SE / ME / 2000 / XP / Vista / 7 and Mac O/S 8.6 and higher
9. All relevant materials are complied with RoHS directive.

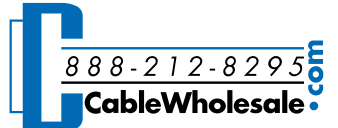6	Molded Blue PVC Hood	Item Number:	UC-502BL
5	Black Heat Shrink Tube Ø0.8*15mm	Title:	USB 2.0 High Speed Active Extension Cable, USB Type A Male to Type A Female, Blue, 5 meter (16 foot)
4	Assembly Transparent Black Hood	Drawn by:	JL
3	USB2.0 A Type Female ,Gold Plating 30u" on Contact, Black Insulator, with PCB:(P/N-502)	Approved by:	MAC
2	USB2.0 A Type Male ,Gold Plating 30u" on Contact, White Insulator, Short Type	ID:	1
1	USB 2.0 Cable, 28AWG*1P+20AWG*2C+AL+Drain+ Braid, OD: 5.0mm, Blue Outer PVC Jacket		
No.	Specifications		