

INTRODUCTION

PK-4PA0-A-EL

The KVM switch allows a single keyboard, video display monitor, and mouse to be switched to access multiple computers. The switch provides more table space in addition to saving the cost of multiple keyboards and monitors.



FEATURES

- Access multiple PCs with one set of Keyboard, Mouse and Monitor.
- Space saving and cost effective.
- Front panel LEDs indicate which PC is selected.
- Select PCs by using front panel SELECT button or Hot Key command.
- Auto Scan Mode sequences through PC.
- Supports SVGA , VGA and multi-sync Monitors, resolutions up to 2048*1536
- Buzz for switching confirmation.
- Windows 98, Me, 2000, XP, Vista and Linux OS compatible.


SPECIFICATION

Function		Specification
Model No.		PK-4PA0-A-EL
PC Port		4
Device Port		2 x PS/2 Device
Port Selection		Select button or Hot-key command
PC Port LED	Selected	4 x Green Color LED
KVM Connector	Console	4 x HDB-15 Female (blue)
		8 x PS/2 Mini-DIN-6 Female
	Keyboard	1 x PS/2 Mini-DIN-6 Female
	Mouse	1 x PS/2 Mini-DIN-6 Female
	Monitor	1 x HDB-15 Female (blue)
Module Weight		270.2 g
Module Dimension (L x W x H)		180 x 108 x 22 mm
Emission		CE, FCC, C-Tick
		 Federal Communications Commission

PACKAGE CONTENTS

- 1 x 4-port PS/2 KVM switch
- 1 x User manual
- 2 x Cables

Hardware Installation

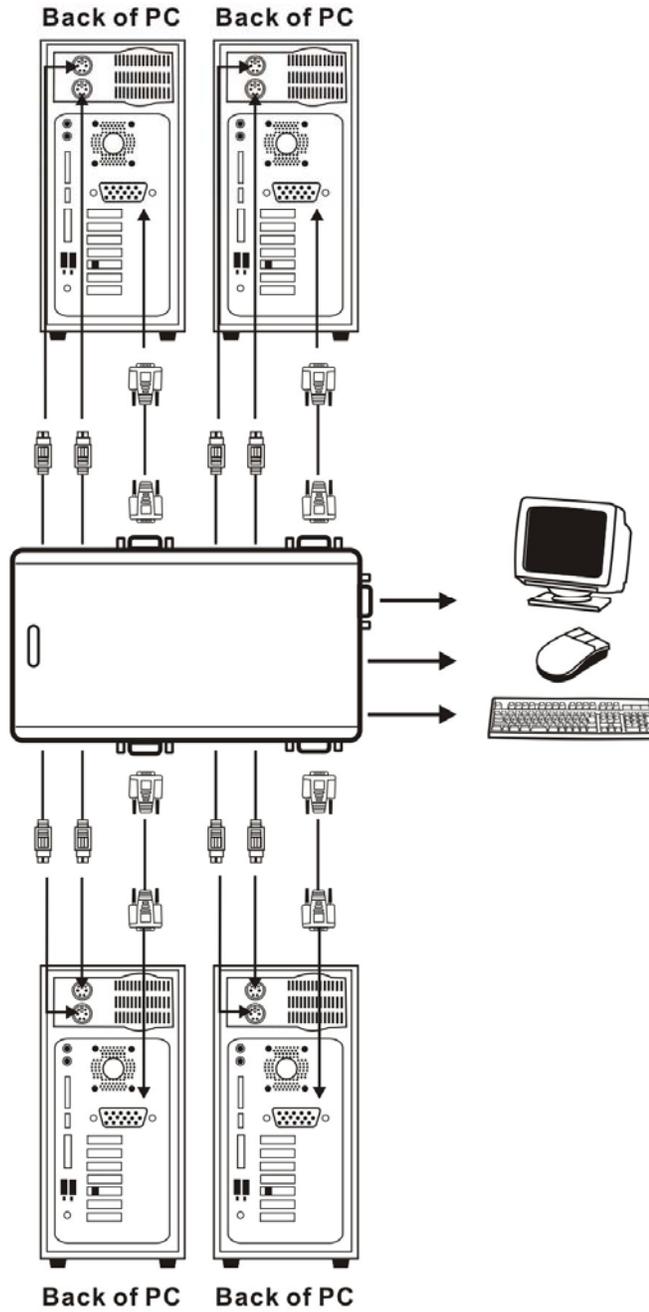

Cables included in the box

Cables:

- PS/2 cable for keyboard and mouse ports

Mini-DIN6 male/male



Mini-DIN6

- Standard VGA cable for monitor port

HDDB15 male/male with thumbscrews




HDDB 15

Configuration


After installation, you can either choose the "SELECT" button that leads you through multiple computers or Hot Key controls.

The SELECT button

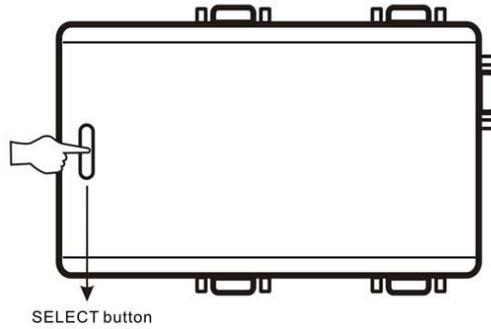

Keyboard Hot Key Menu:

Press [Scroll Lock] twice, and you will hear an audible switching confirmation tone to ensure you are already in the Hot Key Mode (LED is blinking)

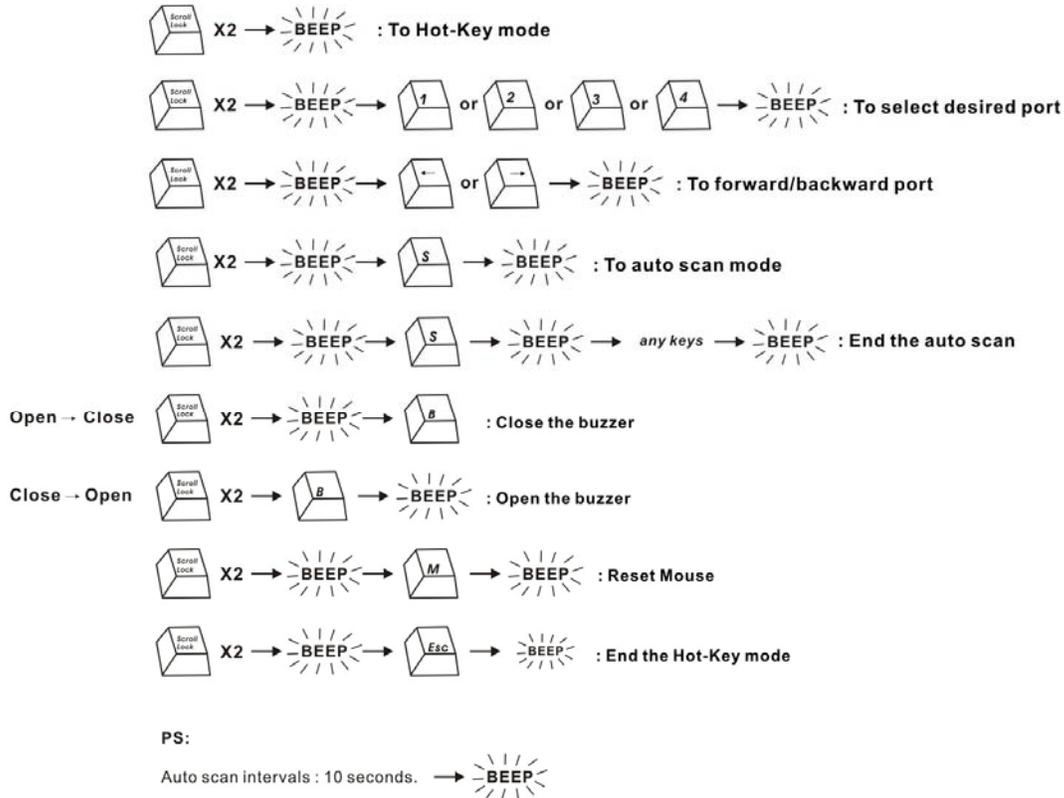

In the Auto Scan mode, the KVM switch remains on one port for 10 seconds before switching to the next. Please notice that the mouse and keyboard control will be restricted in the Auto Scan mode.

P.S: Escape from Hot Key Mode, if you don't press any buttons after 4 or 5 seconds.

Note:

This KVM Switch will not detect whether a computer is on or off if the "Power On" function is set in the Bios. Meaning, when you switch to the computer that is turned off, there will be nothing displayed on the monitor.

Troubleshooting

Q1: The keyboard/mouse is not detected, error reported, or doesn't work after boot up?

A:

Shut down the computer.

Check out cable connection and make sure they are attached properly.

Reboot computer.

Q2: The keyboard is functional, but the mouse is not.

A:

While using the device, we suggest user to plug on mouse first then follow by keyboard at the appointed location on PS2 KVM Switch.

Q3: When the device unoccupied for a moment, the mouse becomes not functional.

A:

If this incident happens, please press 「 Scroll Lock 」 + 「 Scroll Lock 」 + 「 M 」 to restart the device.

Call your dealer if there are any wrong, missing, or damaged parts. Keep the carton, including the original packing materials, to repack the KVM Switch if there is a need to return it for repair.