

TEST-i PRO

Multi Function Cable Tester

TEST-i Pro is the fourth generation of PC cable tester. It is a specially designed multi function PC cable tester that tests and analyzes a comprehensive range of today's PC connector types.

TEST-i Pro includes wire mapping function to test each pins connection to identify opened, shorted, crossed, and mis-wires. It also shows pin-to-pin connectivity, and can save up to 100 test results. The crucial data can be saved and uploaded to a PC via USB interface for analysis.

Furthermore, it also includes built-in extension port for user needs additional types of cable testing that is not included in standard TEST-i Pro. With an integrated LCD display, user can clearly determine the cable pin wiring easily and efficiently. TEST-i Pro is an essential and excellent tester for system integrator for troubleshooting and perform pin-to-pin tests on PC cables.


Features

- Identify open, shorted, crossed, and mis-wires connectivity.
- Support 17 types of PC connectors
- Extension port for additional types of cable testing
- 100 test results can be saved and transferred to PC via USB interface
- Alphanumeric LCD display with back light function
- Includes test cable, browse and quick test function
- Low battery indicator
- Simple menu is easy to use


Specifications

- Model No.: 258011
- Connectors: IDC40, HDB15M/F, Audio, RJ11, RJ45, e-SATAp, SATA, Display Port, USB3.0 (A), USB3.0 Power B, USB Micro AB, USB Mini-B, HDMI, Mini HDMI, Micro HDMI, IDC40 extension port
- Control switch: On/Off, up, down, save, delete, back and enter
- Display: LCD size, 2 rows-16 characters and back light
- Power: DC 9V battery compartment, USB interface for power supply (adapter not included)



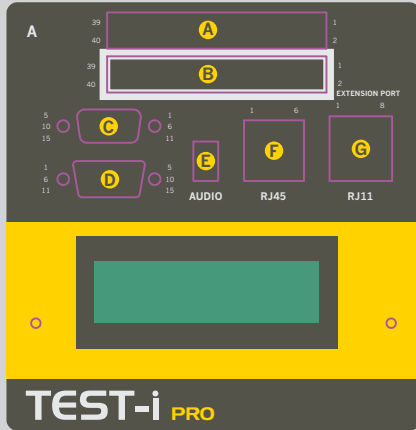

Top panel A

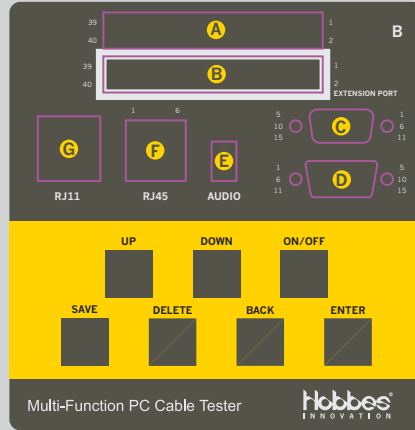


Top panel B




Front panel A



Front panel B



Back panel B



Back panel A

TEST-i Pro cable instructions

Connector cat.	Connector type	Suitable cable
A	IDC40	40 pin IDE and 80 pin Ultra IDE cable
B	IDC40 extension	40 pin IDE cable
C	HDB15 female	VGA HDB15 pin cable (male)
D	HDB15 male	VGA HDB15 pin cable (female)
E	Audio	Stereo audio cable (3.5Φ) (3 pin)
F	RJ11	RJ11 telephone cable (6P6C/6P4C)
G	RJ45	RJ45 network cable (8 pin+shielding)
H	e-SATAp	E-SATA to E-SATA cable, E-SATA to SATA cable, Power E-SATA to Power E-SATA
I	SATA	SATA to SATA cable, E-SATA to SATA cable
J	Display port	Display port cable
K	USB3.0 (A)	USB 3.0 AM to AF extension cable, USB 2.0 AM to AF extension cable, USB 3.0AM to BM cable, USB 2.0 AM to BM cable USB 3.0 A to Micro B (5+5 pin), USB 2.0 A to Micro BM (5 pin), USB 2.0A to Micro AM (5 pin), USB 2.0A to Mini B cable
L	USB3.0P-B	USB 3.0 AM to BM cable, USB 2.0 AM to BM cable, USB 2.0A to Micro BM (5 pin)
M	USB Micro AB	USB 3.0A to Micro B (5+5 pin), USB 3.0 Micro A to Micro B, USB 2.0A to Micro AM (5 pin)
N	USB Mini-B	USB 2.0 A to Mini B
O	HDMI	HDMI to HDMI cable, HDMI to Mini HDMI cable, HDMI to Micro HDMI cable
P	Mini HDMI	HDMI to Mini HDMI cable
Q	Micro HDMI	HDMI to Micro HDMI cable