




REV.	DESCRIPTION	DATE
A		01-2018

Features

1. 12 Volt DC 120V/240V switching power supply
2. Connect and power 18 devices simultaneously
3. Circulation window for 80mm fan (12V, 0.13A)
4. Built in heat sensor to automatically activate the fan (sold separately) when the temperature reaches 80° to keep power distribution box from overheating
5. UL / cUL recognized to meet safety requirements
6. Fan-less transformer to reduce noise
7. Each output comes with its own fuse and LED indicator
8. 18 Amps continuous current
9. 240 Watts total power output
10. 12V 2A per port, 18A total shared
11. Polyfuse:
12. 30V 2.5A
13. 18 polyfuses
14. Punch-out holes for allowing cable access are available on the following sides:
15. Top
16. Left Side
17. Right Side
18. Rear
19. Regulated
20. Measures 9 3/4" L x 3 3/4" D x 8 1/8" W
21. Beige housing
22. Heavy duty solid construction for installation in any environment

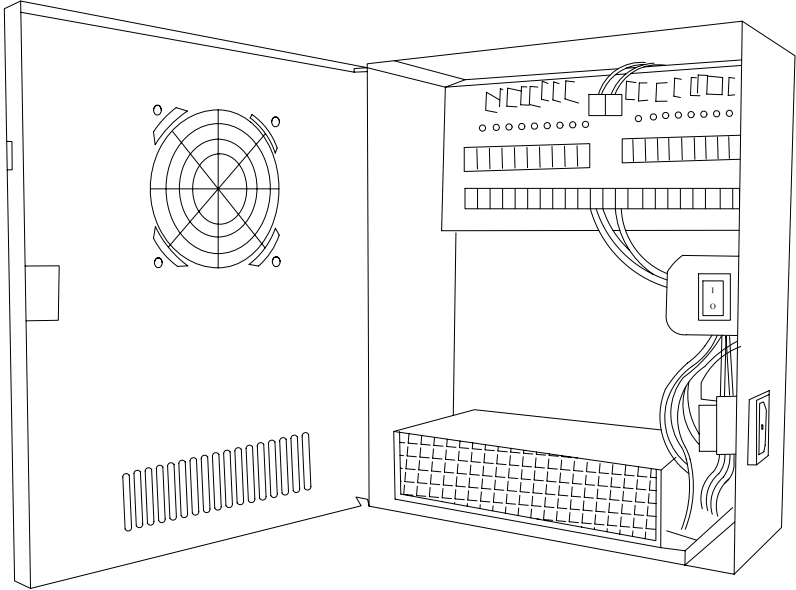

12V DC Power Distribution Box with Circulation Window, 18 Ports, 18 Amps, PTC Fuses, UL / cUL

ITEM NUMBER	90W2-18212			DRAWER	JL
TITLE	18 Port Power Distribution Box, 12 Volts DC / 20 Amps			CHECKED	
				APPROVED	
MATERIAL		SCALE			
REV.	A	UNIT	INCH		
DRAWING NO:				 888-212-8295.com	
ID (NO.)	19				

2	
1	
NO.	SPECIFICATIONS
	BOM LIST