


Rev.	Description	Date
A		05-2019

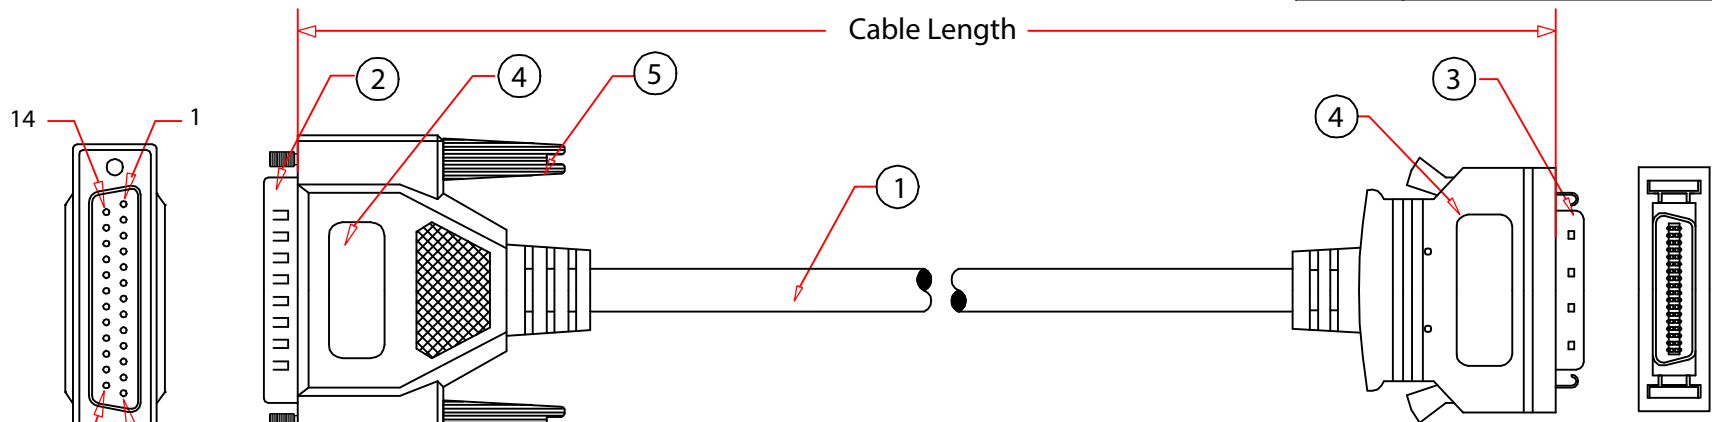

RoHS

Pin Assignment			
DB25/M	HPCE36/M	DB25/M	HPCE36/M
11	1	6	10
23	19	21	28
13	2	7	11
10	20	8	29
24	3	22	12
15	21	9	30
12	4	16	13
2	22	17	31
19	5	18	14
3	23	25	32
4	6	14	15
20	24	1	33
5	7	18	16
	25	17	34
	8	21	17
	26	19	35
	9	22	18
	27	16	36
		14	NC
			NC
		Shield	Shield

PART NO.	CABLE LENGTH
10E2-02103	3 FT
10E2-02106	6 FT

5	#4-40 Molded Thumbscrew, Color Beige	Item Number:	10E2-021xx
4	Beige Molded PVC Hood, Fully Shielded w/Copper Tape	Title:	Parallel Cable, DB25 Male to HPCentronics 36 (HPCN36) Male, 18 Twisted Pairs, A/C Type
3	HPCN 36 Pin Male, w/Gold Plating Contacts	Drawn by:	JL
2	D-Sub 25 Pin Male, w/Gold Plating Contacts	Approved by:	MAC
1	IEEE-1284, 28AWG 18 Twisted Pairs + Drain Wire, Double Shielded with AL-Foil & Copper Braid, Beige Outer PVC Jacket	ID:	1
No.	Specifications		