


Rev.	Description	Date
A		01-2023

Features and Benefits

- 900µm Tight Buffers
- Water blocking aramid yarn strength members
- UV resistant jacket, OFNR rated construction
- Exclusive use of Corning® optical fibers
- Jacket print ensures product identification and fiber compatibility
- Durable jacket offers added protection during installation and in rugged use applications

Description

- Constructed with Corning glass.
- CableWholesale, Inc. Indoor/ Outdoor Cable is composed of 2 to 24 colored tight buffered optical fibers, water blocking aramid yarn, and a UV resistant black PVC outer jacket. All component materials meet the EU RoHS and REACH Directive standards.
- CWS Indoor/ Outdoor Cable is available in carbon black or special order colors(including 12 TIA standard colors). UL Listed OFNR cables are available, and unrated cables may be supplied to accommodate special needs. Standard surface print denotes construction, NEC rating, and fiber type, and includes footage markers.
- Custom print may also be accommodated.

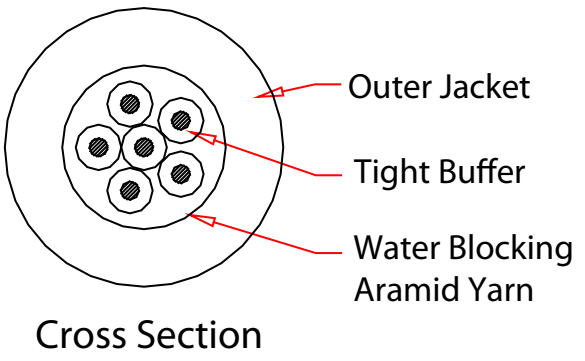

Cable Characteristics

Product	Multimode, 62.5/125
Fiber Count	6
Outer Jacket Material	Flame Retardant PVC
Outer Jacket Color	Carbon Black
Strength Member	Aramid Yarn
Tight Buffer Material	Flame Retardant PVC
Tight Buffer Color	Available in 12 TIA/ EIA color standard

Physical Characteristics	Value(6 Fiber Count)
Nominal Outer Diameter (mm)	4.8
Weight (lbs/ km)	102
Minimum Bend Radius, Installation (cm)	7.2
Minimum Bend Radius, Operation (cm)	4.8



Optical Characteristics

Fiber Type	InfiniCor 300
Core Size [µm]	62.5
Wavelength [nm]	850 / 1300
Max. Attenuation[dB/km]	3.5 / 1.5
Link Length[m]	300 (1Gb/s@850nm)
Bandwidth (EMB High Performance)[MHz.km]	220 @850nm

Specifications

Temperature Range	Indoor
Storage Temperature	-40 °C / +70 °C
Operating Temperature	-40 °C / +70 °C

Application

Riser
Duct
Indoor/Outdoor

Flame Rating

UL 1666
UL 1685 (FT4)

Item Number:	10F3-2062H	
Title:	6 Fiber Indoor/Outdoor Fiber Optic Cable, Multimode, 62.5/125, Black, Riser Rated, Spool, 2000 foot	
Drawn by:	JL	
Approved by:	MAC	
ID:	120	

No.	Specifications
-----	----------------