


Rev.	Description	Date
A		12-2018

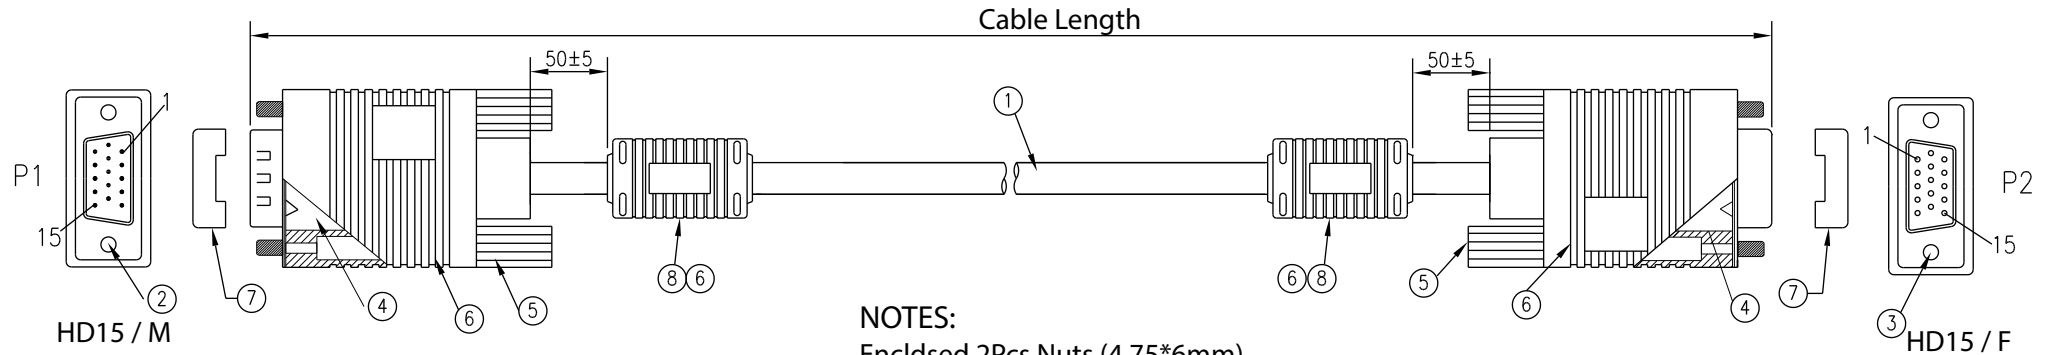

PIN ASSIGNMENT							
HD15 Male		HD15 Female		HD15 Male		HD15 Female	
1		1	Red Coax	9		9	Yellow
6		6	Red Coax Shield	5		5	Red
2		2	Green Coax	12		12	Red / White
7		7	Green Coax Shield	10		10	Orange
3		3	Blue Coax	13		13	Orange / White
8		8	Blue Coax Shield	11		11	Black
4		4	Brown	15		15	Black / White
14		14	Brown / White	Shell		Shell	

RoHS

PART NO.	CABLE LENGTH
10H1-20201	1 ft
10H1-20203	3 ft
10H1-20206	6 ft
10H1-20210	10 ft
10H1-20215	15 ft
10H1-20225	25 ft
10H1-20235	35 ft
10H1-20250	50 ft
10H1-20275	75 ft
10H1-202HD	100 ft

8	Core: 17.5*28.5*10.5mm
7	Dust Cap, White
6	Molding PVC Black
5	Molding Screw 4-40UNC 4*49.5mm, Black
4	100% Metal Shell of HD15P Connector
3	HD15 Female, Black Plastic, Pin Gold Plated 10u"
2	HD15 Male, Black Plastic, Pin Gold Plated 10u"
1	UL2919 Cable, 3Coax 28AWG+5Pair 28AWG+AEB, OD:9.0mm, PVC Jacket Black (Groove)
No.	Specifications

Item Number:	10H1-202xx	
Title:	SVGA Extension Cable with Ferrites, Black, HD15 Male to HD15 Female, Coaxial Construction, Double Shielded	
Drawn by:	JL	 888-212-8295
Approved by:	MAC	
ID:	44	