


REV.	DESCRIPTION	DATE
A		11-2016

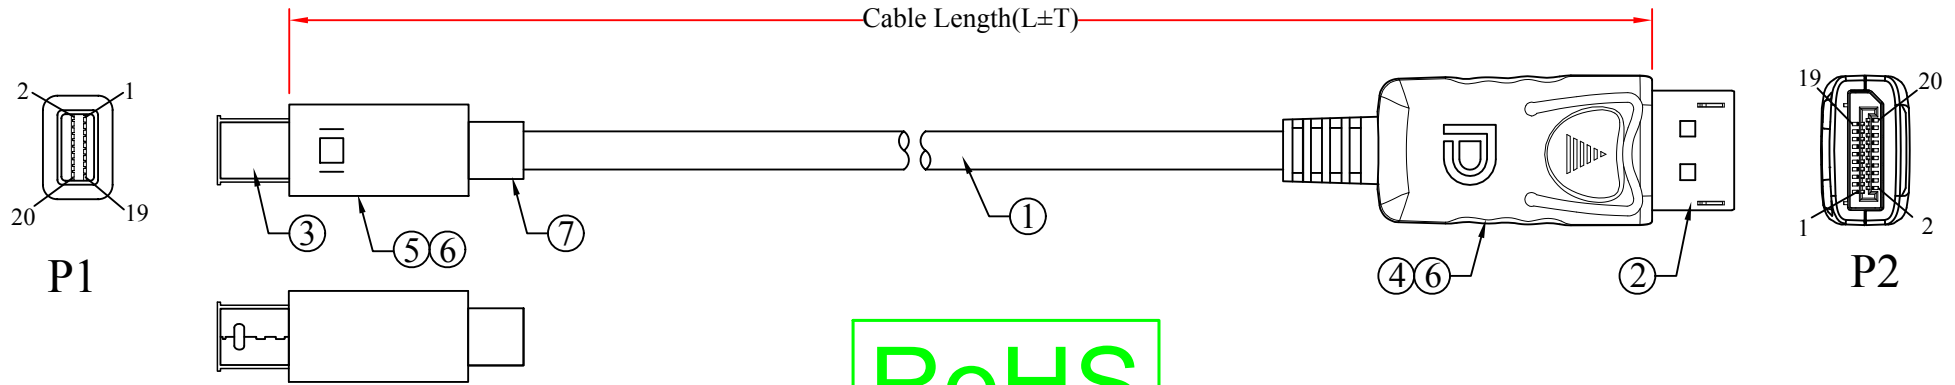

RoHS

Pin Assignment			
P1	P2	P1	P2
3	12	15	6
5	10	17	4
1	11	13	5
9	9	2	18
11	7	4	13
7	8	6	14
16	15	19	19
18	17	20	20
14	16	Shell	Braid
10	3	Shell	Shell
12	1		
8	2		

NOTES:

- 1. Electrical Test:
- (1) 100% Open Short & Miswire Test.
- (2) Insulation Resistance 1 MΩ MIN.

PART NO.	CABLE LENGTH	
	L	±T(mm)
10H1-62103	3 FT	30
10H1-62106	6 FT	50
10H1-62110	10 FT	60
10H1-62115	15 FT	60

7	45P PVC Black
6	Inner Molding LD-PE
5	Mini DP Black Assembly Hood
4	DP Black Assembly Hood
3	Mini Displayport 20P Male, Nickel Plated
2	Displayport 20P Male, Nickel Plated
1	UL20276 (32AWG*1P+D+AL)*5+32AWG*4C+AL/MY+Braid, OD:5.0±0.20mm, Black PVC Jacket
NO.	SPECIFICATIONS
	BOM LIST

ITEM NUMBER	10H1-621xx		DRAWER	JL
TITLE	Mini DisplayPort 1.2 Video Cable, Mini DisplayPort Male to DisplayPort Male		CHECKED	
MATERIAL		SCALE	APPROVED	
REV.	A	UNIT		
DRAWING NO:				
ID(NO.)	106			

