

REV.	DESCRIPTION	DATE
A		
B		03-2008


Product Specification

Construction & Material

Part Number	Color
10K4-0221SF	Gray
10K4-0232SF	Brown
10K4-0261SF	Blue
10K4-0281SF	Yellow
10K4-0291SF	White

Item	Specification	
Product	CM/CL3, Security	
Conductor	Construction	Stranded 2X22AWG(7/30AWG)
	Material	Bare Copper
Insulation	Material	PVC
	Min. thickness	
	Avg. thickness	0.254 mm
	Diameter	1.270 mm
	Nom. Lay Length	Parallel
	Color	Black and Red
Jacket	Material	PVC
	Min. thickness	
	Avg. thickness	0.381 mm
	Diameter	3.302 mm
Color	Gray, Brown, Blue, Yellow and White	
Approximate Cable Weight	11 lbs./Kft	

Cross Section: _____

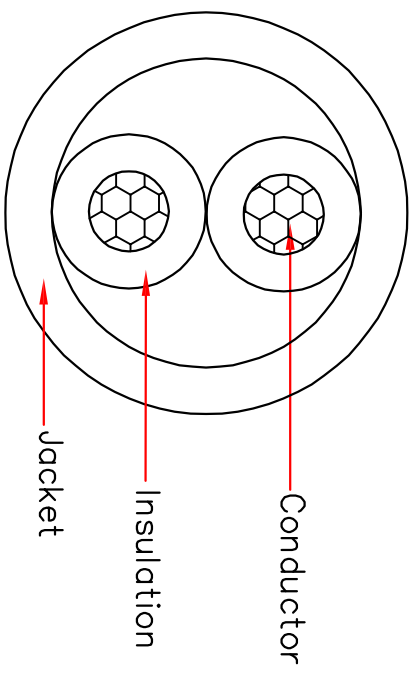

Electrical Properties:		DRAWER	LIBRA
Norm. DC Resistance per Conductor@20°C	16.19 Ohms/Kft.nom.	CHECKED	
Capacitance Between Conductors@KHz	30 pF/ft.nom.	APPROVED	
Operating Voltage	300 V/RMS max.		
Temperature Rating	-20 °C to 60 °C		
PART NUMBER:	TITLE:		
10K4-02xxSF	2/22 Stranded CM/CL3 Pullbox, 500 ft		

