


Rev.	Description	Date
A		10-2021

RoHS

Product Specifications


Construction & Material :

Cross Section

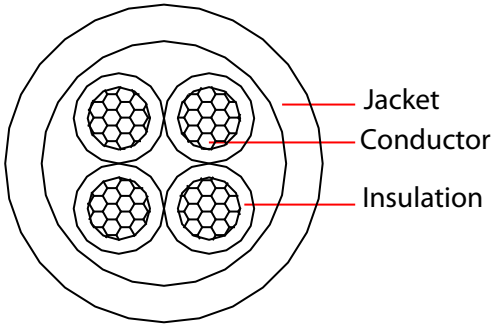

Item		Specifications
Product		CMR Security/Alarm Wire
Conductor	Construction	Solid, 4 x22AWG
	Material	Bare Copper
Insulation	Material	PVC
	Avg.thickness	0.15mm
	Diameter	0.95± 0.05 mm
	Color	Black, Red, White and Green
Jacket	Material	PVC
	Avg.thickness	0.38 mm
	Diameter	OD Average 2.083/ Final Diameter 3.048mm
	Color	White
Marking	STRUCTURED CABLE PRODUCTS --- P/N 22/4SOL --- (UL) CL3R E198137 (UL) C(UL) CMR UNSH 4/C 22 AWG --- ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 RoHS	
Package Weight	13 lbs / 5.91 kgs	

Characteristics	
Mutual Capacitance	21.9 pF/ft
DC Resistance 25°C	19.5 Ohms / 1000 ft
Impedance	80.8 Ohms
Velocity of Prop	68 %
Inductance	1.3 mH/km
Temp/Voltage	60°C / 300V
Operating Temperature	-20°C to 60°C

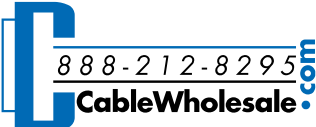Item Number:	10K4-04912TH	
Title:	Security/Alarm Wire, White, 22/4 (22AWG 4 Conductor), Solid Copper, CMR / Inwall Rated, Pullbox, 1000 foot	
Drawn by:	JL	
Approved by:	MAC	
ID:	123	

No.	Specifications
-----	----------------