


RoHS

| | | |
|------|-------------|---------|
| Rev. | Description | Date |
| A | | 10-2018 |

Product Specifications


Cross Section

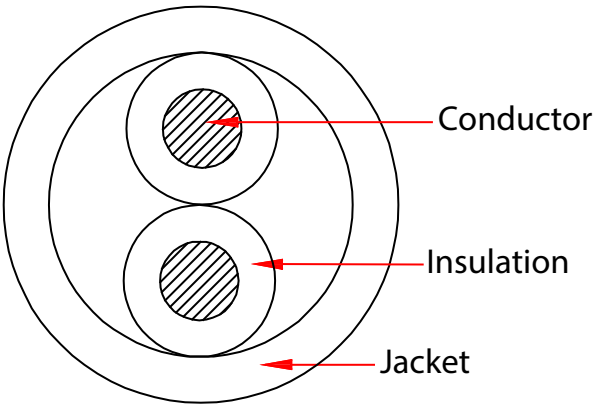

Construction & Material :

| Item | | Specifications |
|--------------------------|---------------|-----------------------|
| Product | | UL CL3R Speaker Cable |
| Conductor | Construction | Stranded 14AWG |
| | Material | Bare Copper |
| Insulation | Material | PVC |
| | Avg.thickness | 0.25mm |
| | Diameter | 2.36 ± 0.10 mm |
| | Color | Red And Black |
| Jacket | Material | PVC |
| | Avg.thickness | 1.15 mm |
| | Diameter | 5.50 ± 0.20 mm |
| | Color | Gray |
| Approximate Cable Weight | | 37 lbs./Kft |

| Characteristics | |
|-----------------|--|
| Capacitance | 32 pF/ft Nom. |
| Vel of Prop | 5% |
| Impedance | 34.7 OHMS |
| Temp/Voltage | 75 DEG C / 300V |
| Resisance | 2.73 OHMS D.C. PER 1000 FT @ 68 DEG. F |
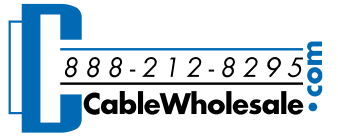
| | | |
|--------------|--|---|
| Item Number: | 10K7-0221MH | |
| Title: | Security/Alarm Wire, Gray, 14/2 (14AWG 2 Conductor), Stranded, CM / Inwall rated, Spool, 1000 foot | |
| Drawn by: | JL |  |
| Approved by: | MAC | |
| ID: | 204 | |

| | |
|-----|----------------|
| No. | Specifications |
|-----|----------------|