


Rev.	Description	Date
A		08-2019

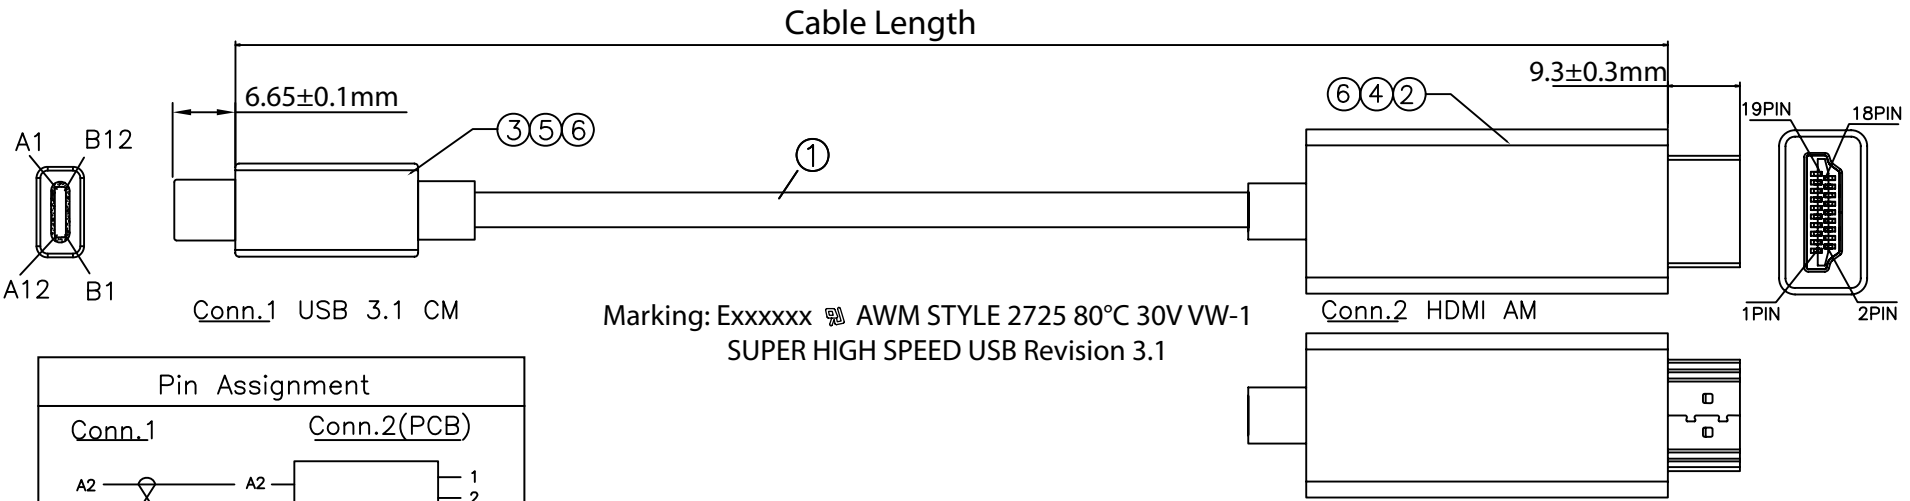

Conn.1 USB 3.1 CM

Marking: Exxxxxx AWM STYLE 2725 80°C 30V VW-1
SUPER HIGH SPEED USB Revision 3.1


Conn.2 HDMI AM

Pin Assignment	
Conn.1	Conn.2(PCB)
A2	A2
A3	A3
A5	A5
A6	A6
A7	A7
A8	A8
A10	A10
A11	A11
B2	B2
B3	B3
B5	B5
B8	B8
B9	B9
B10	B10
B11	B11
B12	B12
	19 SHELL

RoHS

Electrical Performance Test: Type C to HDMI Machine Testing
 1. The Video Has no Signal Jitter, Smearing, Ghosting, Missing Color and Other Abnormal Displaying.
 2. TV or Monitor: 4K*2K/30Hz

PART NO.	CABLE LENGTH
10U2-34003WH	3 ft
10U2-34006WH	6 ft

6	Molding PVC, White	Item Number:	10U2-340xxWH	
5	Plastic Hood for USB3.1 Type C, Material ABS, Color White		Title:	4K@30Hz, UHD USB-C to HDMI, Phone to UHDTV, White
4	Plastic Hood for HDMI, Material ABS, Color White	Drawn by:		JL
3	USB3.1 C Male, Solder Type, Shell Gold Plated, Ecru Insulation		Approved by:	MAC
2	Type C to HDMI Male, PCBA(IC:8711), Shell Gold Plated, Black Insulation	ID:		108
1	USB3.1 [32#(7/0.08TC)*1P+D(7/0.08TC)+AL+MY]*4+32#(7/0.08TC)*1P+32#(7/0.08TC)*4C+22#(65/0.08TC)*2C+F+AB(16/9/0.08TC), OD4.5mm, White PVC Jacket			
No.	Specifications			