



REV.	DESCRIPTION	DATE
A		03-2016

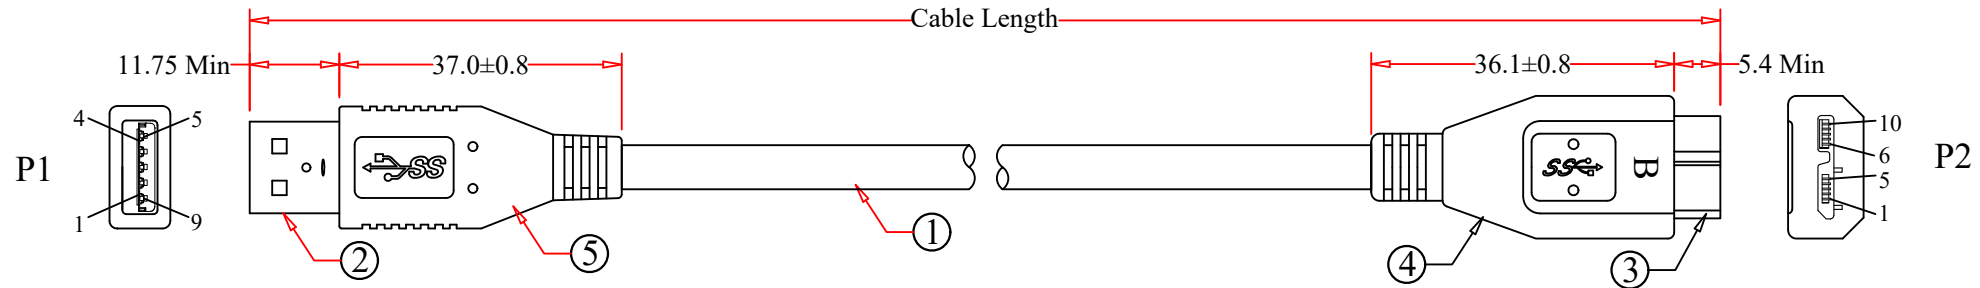

Pin Assignment		
P1		P2
1	Red	1
2	Green	2
3	White	3
4	Black	5
5	Blue(Yellow)	6
6	White(Blue)	7
7	Drain	8
8	Red(Orange)	9
9	White(Purple)	10
Shell	Braid+Drain	Shell

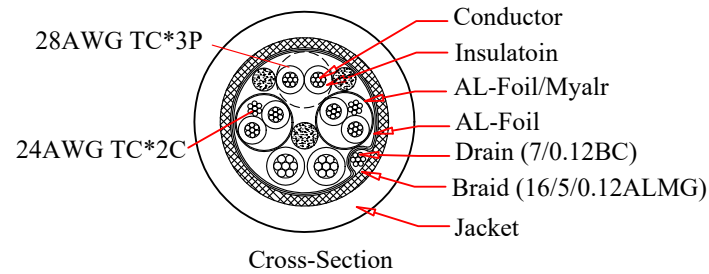

RoHS

**NOTES:**

1. Electrical Test:
  - (1) 100% Open Short & Miswire Test.
  - (2) Insulation Resistance 1 MΩ MIN.

PART NO.	CABLE LENGTH	
	L	±T(mm)
10U3-03101	1 FT	-10/+50
10U3-03103	3 FT	±50
10U3-03106	6 FT	±50
10U3-03110	10 FT	±50

4	Blue Molded PVC
3	USB3.0 Micro B Male, Contact:Gold Flash, Shell: Nickel Plated, Insulation Black
2	USB3.0 Type A Male, Contact:Gold Flash, Shell: Nickel Plated, Insulation Blue
1	UL2725[28AWG(7/0.127TC)*1P+D(7/0.12TC)+AL-Foil+Mylar]*2C+28AWG(7/0.27TC)*1P+24AWG(7/0.20TC)*2C+AEB(16/5/0.12ALMG),OD: 5.5±0.2mm, Blue Outer PVC Jacket
NO.	SPECIFICATIONS

BOM LIST

ITEM NUMBER	10U3-031xx		DRAWER	JL
TITLE	USB 3.0 Cable,Blue Type A Male /Micro B Male		CHECKED	
MATERIAL	SCALE		APPROVED	
REV.	A	UNIT	INCH	
DRAWING NO:			 888-212-8295.com <b>CableWholesale.com</b>	
ID(NO.)	124			