

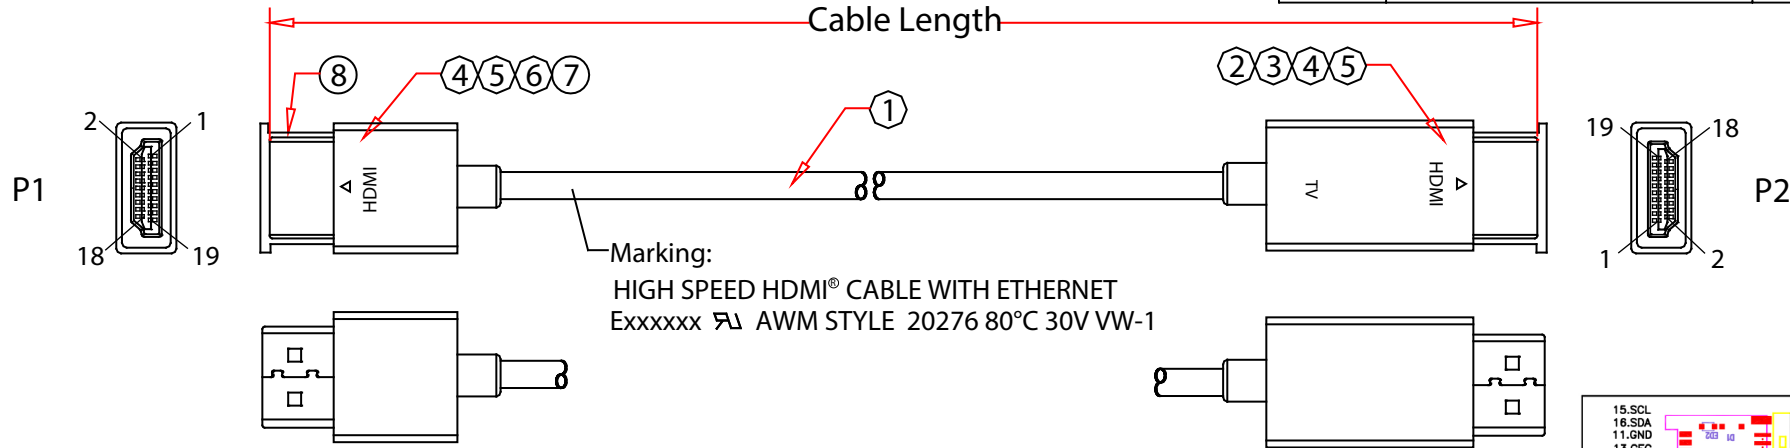


Rev.	Description	Date
A		04-2019

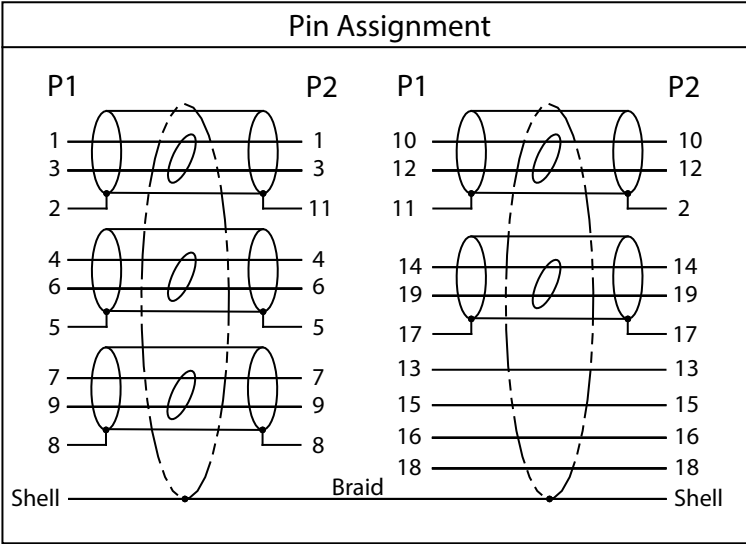

RoHS



PART NO.	CABLE LENGTH
10V3-48103	3 FT
10V3-48106	6 FT
10V3-48110	10 FT
10V3-48115	15 FT


Electrical Test:

- 100% Test (Open, Short, Miss Wire)
- Contact Resistance: 5 Ohm Max.
- Insulation Resistance: 10M Ohm Min.
- Hi-Pot: 100V DC/10ms

8	HDMI Cap
7	HDMI AM ABS Shell, Color: Black
6	HDMI 19Pin Male, Pin & Shell Gold Plating Insulation Black

5	Outer Molded PVC , Black
4	Inner Molded PE
3	RedMere ABS Shell, Color: Black
2	HDMI(Type A) Extender with PCB, Pin & Shell Gold Plating Insulation Black
1	HDMI 1.4v UL20276 [34#(7/0.06TC)*1P+D+AL/Mylar]*5+36#(7/0.05TC)*4C +AL+Braid(16/9/0.06TC 80% Coverage) ,OD:3.6mm, Black PVC Jacket

No.	Specifications
-----	----------------

Item Number:	10V3-481xx	
Title:	Ultra-Slim Active HDMI Cable, High-Speed with Ethernet , RedMere chipset, 4K@30Hz, 36AWG, Black	
Drawn by:	JL	
Approved by:	MAC	
ID:	1	