


MARKING: 350MHz (UL) E305668 TYPE CMG 24AWG 75°C CSA 204790 CMG
 75°C FT4 ETL VERIFIED TIA/EIA-568-C.2 UTP CAT.5E RoHS COMPLIANCE BATCH NO.

Rev.	Description	Date
A		04-2023

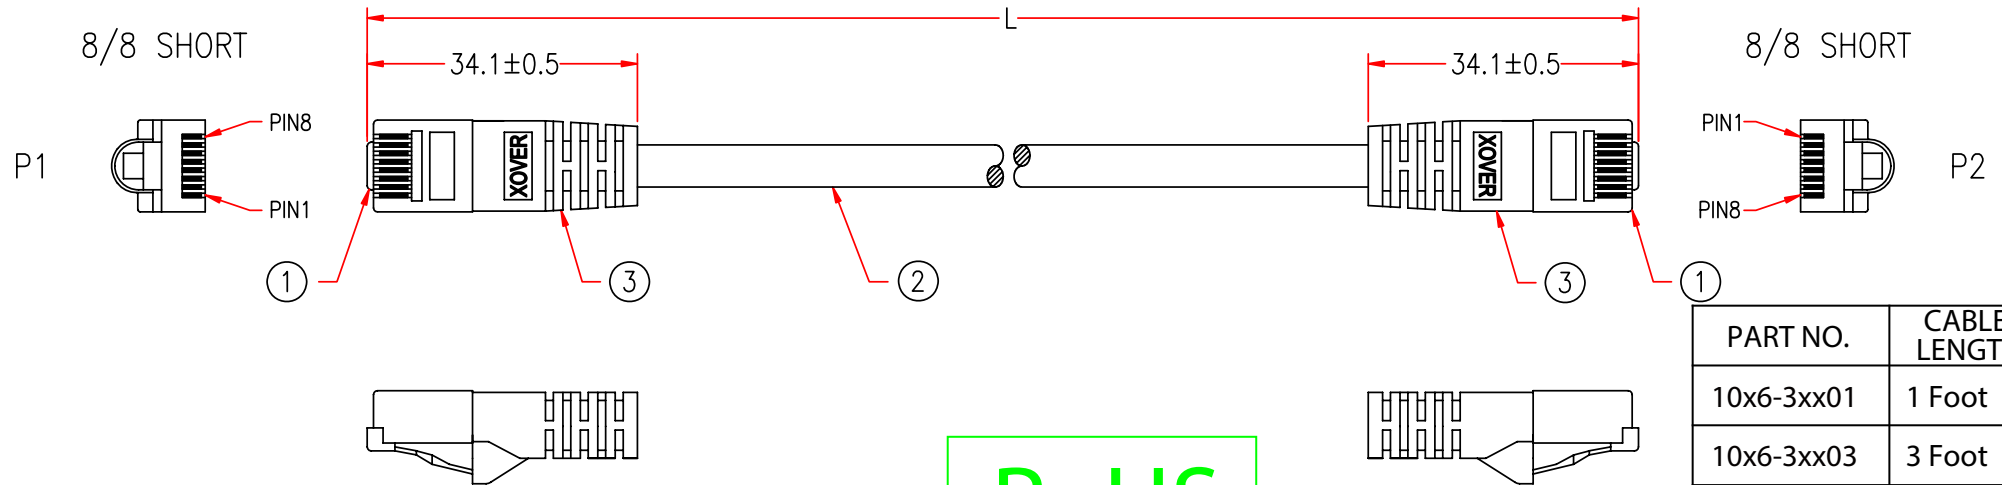

RoHS

Pin Assignment			
P1		P2	
1	↔	3	WHITE/ORANGE
2	↔	6	ORANGE
3	↔	1	WHITE/GREEN
6	↔	2	GREEN
4	↔	4	BLUE
5	↔	5	WHITE/BLUE
7	↔	7	WHITE/BROWN
8	↔	8	BROWN

Jacket and molded PVC Color:
 Gray, Orange, Red

PART NO.	CABLE LENGTH
10x6-3xx01	1 Foot
10x6-3xx03	3 Foot
10x6-3xx05	5 Foot
10x6-3xx07	7 Foot
10x6-3xx10	10 Foot
10x6-3xx14	14 Foot
10x6-3xx25	25 Foot
10x6-3xx50	50 Foot
10x6-3xx75	75 Foot
10x6-3xxHD	100 Foot

4	
3	Molded PVC
2	8P8C Modular Plug, Gold Plating 50u" on Contacts, Short Type
1	CAT.5E UTP 24AWG (7/0.19AS) , OD:5.3mm, PVC Jacket
No.	Specifications

Item Number:	10x6-3xxxx	
Title:	Cat5e Gray Copper Ethernet Crossover Cable, Snagless/Molded Boot	
Drawn by:	JL	
Approved by:	MAC	
ID:	1	