




REV.	DESCRIPTION	DATE
A		
B		10-2007



Male / P1



Female / P3

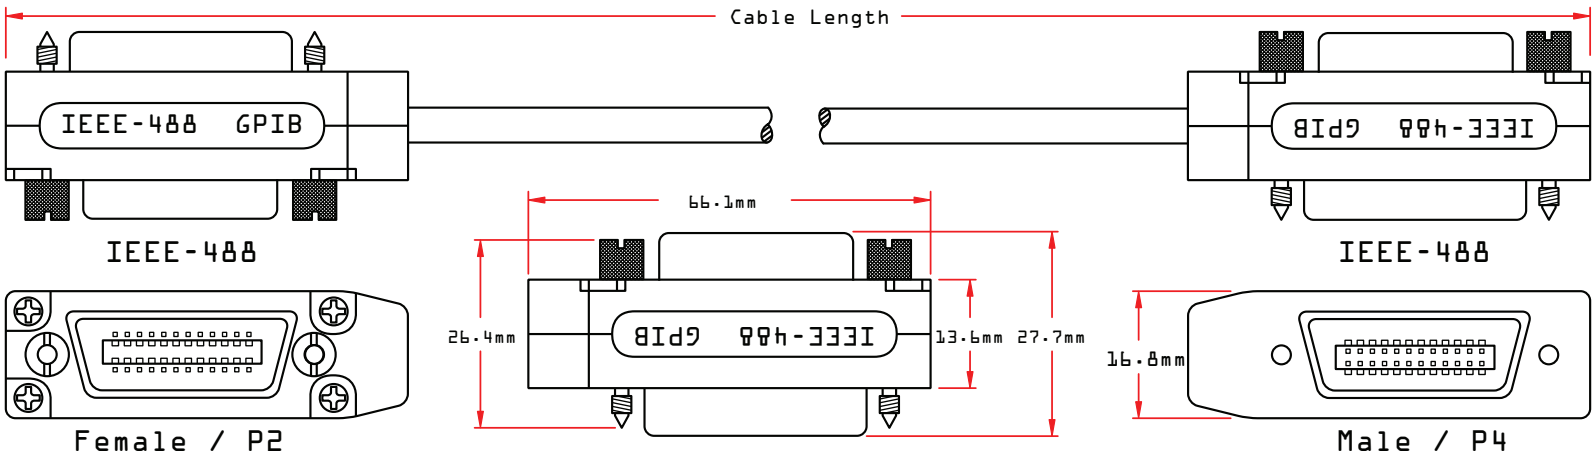

PART NO.	CABLE LENGTH
11E1-0170H	1.6 ft
11E1-0170L	3.3 ft
11E1-01702	6.6 ft
11E1-01704	13.2 ft
11E1-01705	16.5 ft
11E1-01708	26.4 ft

Pin Assignment

IEEE-488		IEEE-488	
P1/2	P3/4	P1/2	P3/4
1	1 Brown	7	7 Yellow
13	13 Brown/White	19	19 Yellow/Black
2	2 White	8	8 Green
14	14 Orange/Black	20	20 Green/White
3	3 Blue	9	9 Purple
15	15 Blue/White	21	21 Purple/White
4	4 Red	10	10 Grey
16	16 Red/White	22	22 Grey/Black
5	5 Orange	11	11 Light Green
17	17 Orange/White	23	23 Green/Black
6	6 Pink	Shell 12	12 SHELL Black
18	18 Red/Black	24	24 Black/White

ITEM NUMBER	10E1-017xx		DRAWER	MPD
TITLE	CN24 (GPIB) to CN24 (GPIB), IEEE-488 Cable, OD: 5.0mm		CHECKED	MAC
MATERIAL		SCALE	APPROVED	MAC
REV.	A	UNIT	INCH	

CN24P Female, Black Insulation, Assembly Shell (GPIB24 F)
 CN24P Male, Black Insulation, Assembly Shell (GPIB24 M)
 UL2464 26AWG 12 Pair + AL-Foil + Braid + Drain. OD = 10.7+/-0.15mm

