

Rev.	Description	Date
A		03-2019


RoHS

Product Specifications


Construction & Material :

Item		Specifications	
Product		CMP RG6 Coaxial Cable	CMP Power Cable
Conductor	Construction	Solid 18AWG	Stranded 18AWG*2C
	Material	Bare Copper	Bare Copper
Dielectric	Material	Foamed FEP	Remguard Plenum Polymer
	Avg.thickness	1.60 mm	0.34 mm
	Diameter	4.30± 0.10 mm	1.7± 0.10 mm
Braid	Construction	95% Coverage	/
	Material	Bare Copper	/
Jacket	Material	Flame-retardant polyvinyl chloride (FRPVC)	
	Avg.thickness	0.60 mm	1.10 mm
	Diameter	5.90 (±0.20)+4.80(±0.15)mm	
	Color	White	
Approx. Wt.		70 lb./1000 ft.	

Cross Section

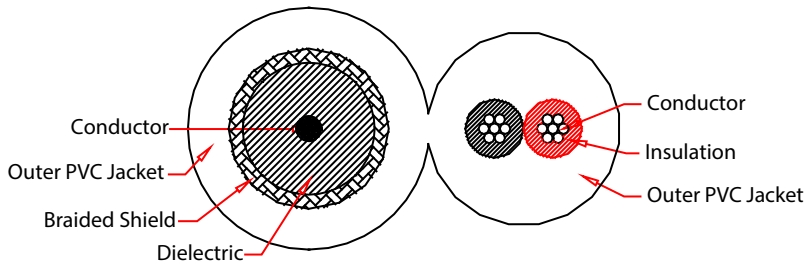

Characteristics	
Capacitance	16.3 pF/ft Nominal
Impedance	75±3 Ohm
Velocity of Prop	82%
Ratings	75°C 300 V

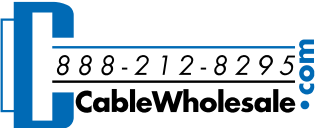Item Number:	11X4-18291NH	
Title:	RG6 Siamese Plenum Solid Coaxial Cable + 18/2 (18AWG 2C) Power, White, Spool, 1000 ft	
Drawn by:	JL	
Approved by:	MAC	
ID:	126	

No.	Specifications
-----	----------------