

## Overview

Cablewholesale Armored Fiber Optic Cable is used in building wiring applications. It can be installed in walls, between floors, in plenum air handling ducts and under data center floors indoor or indoor/outdoor application. The armored cable consists of 0.9mm tight buffered fiber surrounded by yarn acting as a strength member. The core is protected by a spirally-wrapped steel tube that offers easy installation and high crush resistance.

Its structure contains stainless steel armor inside the jacket, this will help make the armored fiber patch cord resistant of high tension and pressure and it is not easy to break when bent or dragged. The stainless steel tube prevents optic fiber from damage that improves stability of the system.

## Features

- It is flexible, anti-rodent, pressure resistance.
- The structure is Anti-rodent ringed steel protection & External reinforced aramid yarn protection
- High tensile strength, pressure resistant, rodent protected.
- Good mechanical and environmental characteristics
- Flame retardant characteristics
- Soft, flexible, easy to splice, and with big capacity data transmission
- Anti rodent and UV stable

## Cable Parameters


Product	OS2 9/125 Singlemode
Fiber Count	12 cores
Fiber Type	CORNING Glass
Cable Type	900um Tight Buffered
Tight buffer material	PVC
Strength Member	Aramid Yarn
Armor	Spiral steel armor
Cable Color	Yellow
Outer Jacket	Riser Rated

## Technical Parameter

Fiber Count	12	
Outer Diameter (mm)	7.0±0.3	
Nominal Weight(KG/KM)	65	
Max. Tensile Strength(N)	Short-term	1200
	Long-term	600
Min. Bending Radius (mm)	Dynamic	150
	Static	75
Max. Lateral Pressure N/100mm	3000	

## Application

- Widely used in FTTH access network
- Telecommunication Networks
- CCTV Networks
- Data communications Networks
- Local Area Networks

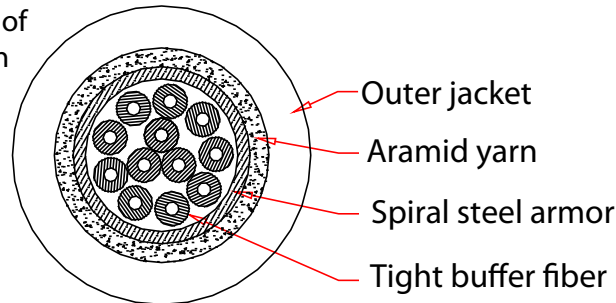

**Cross Section**

Rev.	Description	Date
A		06-2022



## Optical Fiber Characteristics

Fiber Type	CORNING SMF-28 Ultra O SM G657A
Core Size	9um
Wavelength	1310nm/1550nm
Max. Attenuation	(0.5/0.4)dB/km
Bandwidth(EMB) (High Performance)	/
Link Length(10Gb/s)	/
Cladding diameter(um)	125±0.7
Core-Clad Concentricity	≤0.5 um
Cladding non-circularity(%)	≤0.7
Coating-Cladding concentricity(um)	≤12.0
Coating diameter(um)	242±5
Core diameter(um)	8.2
Effective Group Index of Refraction(Neff)	1310nm:1.4676 1550nm:1.4682
Fatigue Resistance Parameter(Nd)	20
Temperature Dependence	-60~85°C
Temperature-humidity cycling	-10 to +85°C, 98% R.H.

Item Number:	20F2-012NF	
Title:	Armored 12 Strand Indoor Distribution Fiber Optic Cable, OS2 9/125 Singlemode, Corning, Yellow, Riser Rated, Spool, 500 foot	
Drawn by:	JL	
Approved by:	MAC	
ID:	399	