


# RoHS

REV.	DESCRIPTION	DATE
B		01-2019

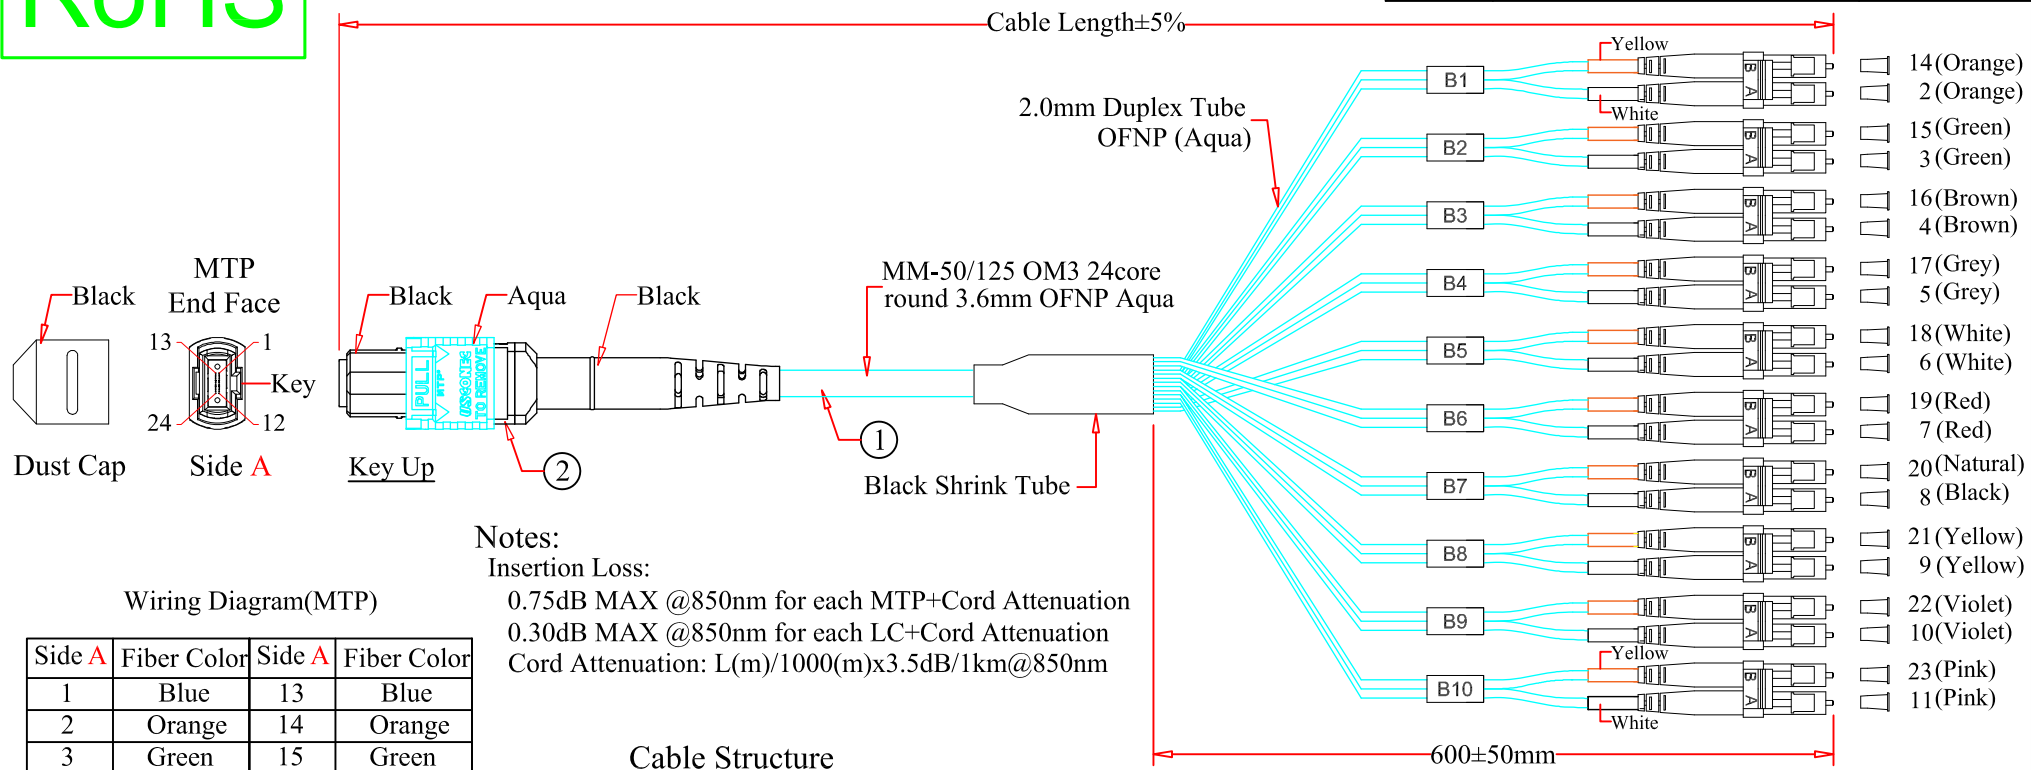


**Notes:**  
 Insertion Loss:  
 0.75dB MAX @850nm for each MTP+Cord Attenuation  
 0.30dB MAX @850nm for each LC+Cord Attenuation  
 Cord Attenuation: L(m)/1000(m)x3.5dB/1km@850nm

Wiring Diagram(MTP)

Side A	Fiber Color	Side A	Fiber Color
1	Blue	13	Blue
2	Orange	14	Orange
3	Green	15	Green
4	Brown	16	Brown
5	Grey	17	Grey
6	White	18	White
7	Red	19	Red
8	Black	20	Natural
9	Yellow	21	Yellow
10	Violet	22	Violet
11	Pink	23	Pink
12	Aqua	24	Aqua

Cable Structure

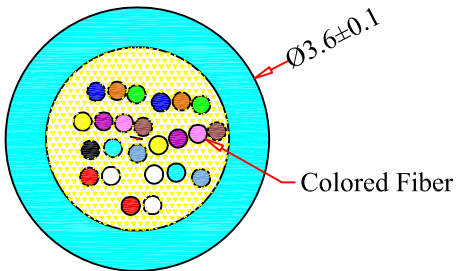

PART NO.	CABLE LENGTH	PART NO.	CABLE LENGTH	PART NO.	CABLE LENGTH
MPLC-32003	3 Meter	MPLC-32010	10 Meter	MPLC-32030	30 Meter
MPLC-32005	5 Meter	MPLC-32015	15 Meter	MPLC-32050	50 Meter

ITEM NUMBER	MPLC-320xx		DRAWER	JL
TITLE	Plenum Fiber Optic Cable, MTP/F-LC(DX) x10 OM3 OFNP,50/125		CHECKED	
MATERIAL	SCALE		APPROVED	
REV.	A	UNIT	MM	

3	LC Duplex Connector
2	US CONEC MTP Connector
1	MM-50/125 OM3 ,24Core Round 3.6mm ,OFNP Aqua Jacket
NO.	SPECIFICATIONS
	BOM LIST

DRAWING NO:  
ID(NO.) 124